


# EGGERS COLLECTION: E605



NON-RATED, 20-, 45-, 60-, & 90-MINUTE POSITIVE PRESSURE

## FLAT OR RAISED PANELS

DIMENSIONS	DOOR HEIGHT: UP TO 10'-0" WIDTH: UP TO 2'-0" THICKNESS: 1-3/8" (NON-RATED), 1-3/4", OR 2-1/4" STILE & RAIL WIDTH: 2-1/2" STILES ALLOWED ON DOORS UP TO 1'-9" BOTTOM RAIL WIDTH: 10"
STILES	PARTICLEBOARD OR DOUBLE REFINED MDF - STILES HAVE HARDWOOD EDGE
RAILS	PARTICLEBOARD OR DOUBLE REFINED MDF - SEALED TOP & BOTTOM RAILS
GLASS OPTIONS	GLASS OPTIONS VARY ON DOOR SELECTION. CONSULT VT FOR MORE INFORMATION.
FINISH	WDMA TR-8/ SYSTEM 10 WATER-BASED UV CURED ACRYLATED POLYURETHANE IS STANDARD. PRIMED AND OPAQUE COATINGS ALSO AVAILABLE. VT COLOR CHOICES ARE AVAILABLE OR CUSTOM COLOR MATCHING BY SUBMITTING A PHYSICAL SAMPLE (MINIMUM 3" X 5")
STICKING, PANELS, & MOULDING OPTIONS	<ul style="list-style-type: none"> <li>STANDARD &amp; CUSTOM STICKING / BEAD PROFILES AVAILABLE; OPTIONS AVAILABLE VARY DEPENDING ON FIRE RATING</li> <li>RAISED AND FLAT PANEL</li> <li>OPTIONAL RAISED MOULDING</li> <li>PANELS CAN BE REPLACED WITH GLASS</li> </ul>
ADHESIVE	TYPE 1 ADHESIVE
ACOUSTICAL RATING	REFER TO STC CHART
QUALITY STANDARDS	WDMA I.S. 6A & AWS, SECTION 9 QUALITY STANDARDS
WDMA PERFORMANCE LEVEL	EXTRA HEAVY DUTY, FIRE COMPOSITE BLOCKING NOT REQUIRED FOR THIS DOOR TYPE
SUSTAINABILITY	<ul style="list-style-type: none"> <li>MINIMUM 88% PRE-CONSUMER RECYCLED CONTENT</li> <li>CARB PHASE 2 / TSCA VI COMPLIANT GREENGUARD GOLD</li> <li>FSC UPON REQUEST, CONSULT VT FOR LEED DOCUMENTATION</li> <li>ENVIRONMENTAL PRODUCT DECLARATION (EPD)</li> <li>HEALTH PRODUCT DECLARATION (HPD)</li> </ul>
DOOR WEIGHT	VARIES BY ELEVATION AND SIZE; PLEASE CONSULT WITH VT
WARRANTY	LIMITED LIFETIME; INTERIOR USE ONLY. <a href="#">VIEW WARRANTY.</a>

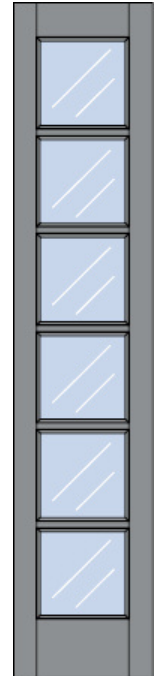

E605

^ Custom sizes and options available, longer lead times may apply. Please refer to the Stile and Rail Component Dimensions Chart for more information \* Component Dimensions are based on nominal opening size of door # Door height & width restrictions vary depending on fire rating restrictions \*\* Stile width may vary depending on lite opening, hardware, and/or fire rating

VT INDUSTRIES RESERVES THE RIGHT TO CHANGE DESIGN AND/OR DETAILS OF ITS PRODUCTS WITHOUT NOTICE.



1000 Industrial Park  
Holstein, IA 51025

800.827.1615

info@vtindustries.com  
vtindustries.com