



PROFILE DOOR ELEVATIONS Heritage Collection


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:*	Top Rail: 6"	Stile: 6"	Mid Rail: 4"
	Bottom Rail: 10"	Mullion: 4"	Lock Rail: 6"

* Available Non-Rated and 20 Minute Positive Pressure Hollow Metal Frames only.
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

FS1041

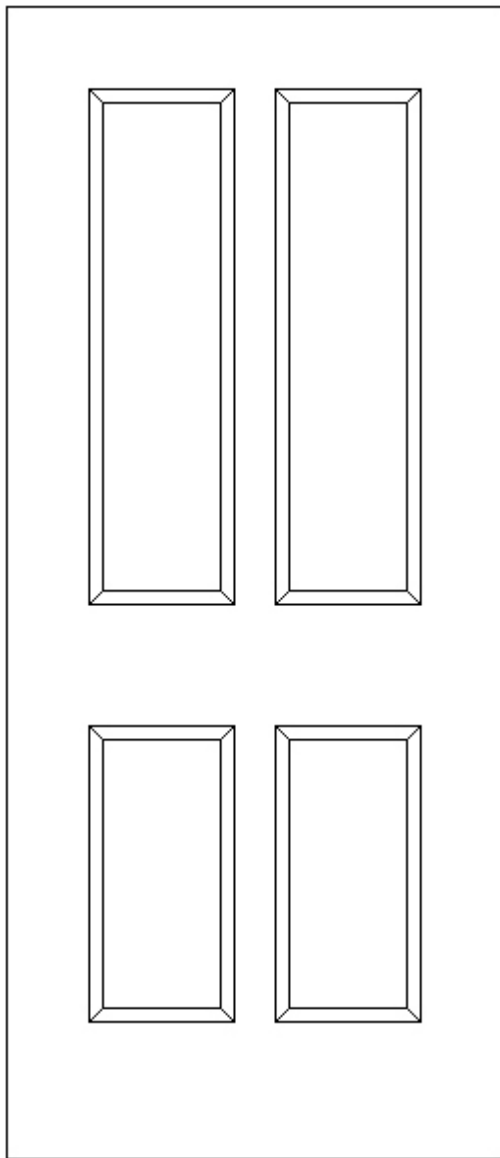

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Mullion: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Routing Profile

- VT2
- VT3
- VT4

#Panel dimensions will vary depending on prefit door size