



STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Glass Thickness: 1/4"
 Bottom Rail: 10" Mullion: 3"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
 (C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage Artistry

SS5041 **SA5041** **SR5041**
 Heritage Only Heritage Only

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____ Bottom Rail: _____

Hinge and Lock Stiles: _____ Mullion: _____

C/L of Lock Rail Assembly from TOD: _____ Mid Rail: _____

Lock Rail Panel Height: _____

(Standard Lock Rail Panel Height is 8")

Bottom Panel dimensions are equal

Sticking

Heritage Collection

Artistry Collection

- H1-Ovolo
- H2-Square
- H3-Ogee
- Other - Supply Drawing

- A1
- A2
- A3
- A4
- A5
- A6
- A7
- Other- Supply Drawing

Panels##

- Raised
- Flat

C/L Lock Rail Assembly


Glass**

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	<input type="checkbox"/> Other:

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

Panel dimensions not specified will vary depending on prefit door size
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size

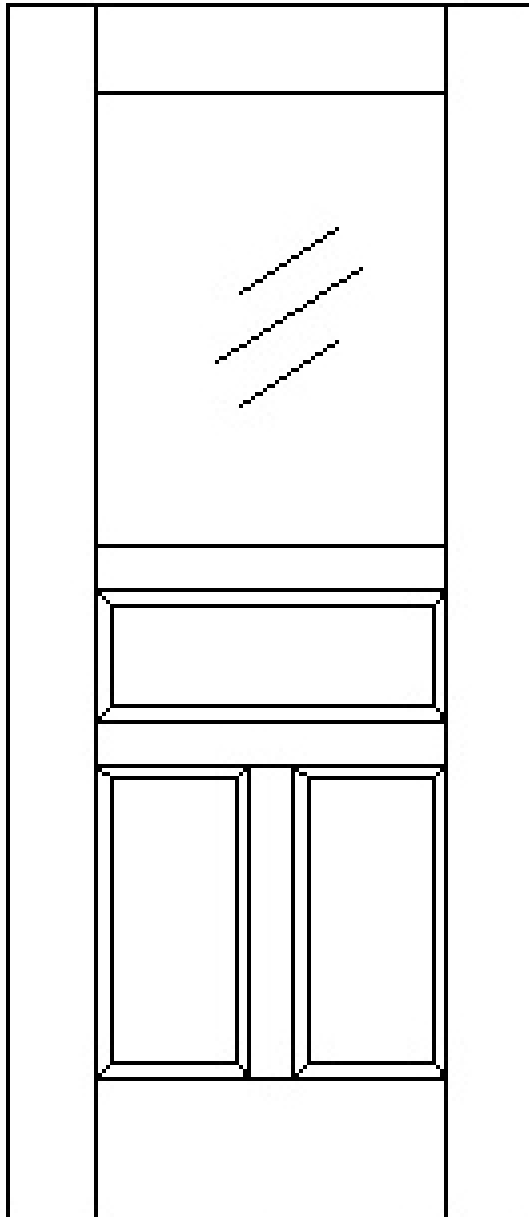

Lock Rail Panel Height