# STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Bottom Rail: 10" Stile: 6" Muntin: 1/2" Lock Rail: 8 3/4" Glass Thickness: 1/4"

* Non-Rated Only
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ Heritage ☐ Artistry

☐ **SS5071**

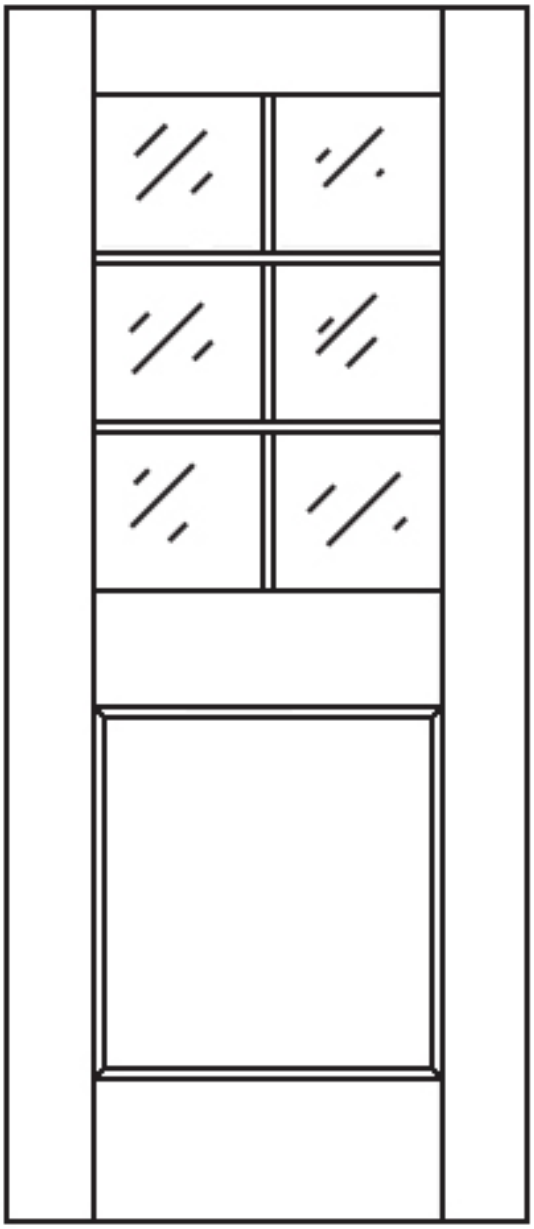

**Dimensions**

☐ Standard - see above
☐ Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Mullion: _____

Mid Rail: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Glass Opening Dimensions are Equal

**Sticking**

**Heritage Collection**
☐ H1-Ovolo
☐ H2-Square
☐ H3-Ogee
☐ Other – Supply Drawing

**Artistry Collection**
☐ A1
☐ A2
☐ A3
☐ A4
☐ A5
☐ A6
☐ A7
☐ Other- Supply Drawing

**Panels#**
☐ Raised
☐ Flat

**Glass****

| Supplied By: | Thickness/Type |
|---|---|
| ☐ VT<br>☐ Other | ☐ 1/4" Tempered*** ☐ 1/4" Wire<br>☐ Other: _____ |

**Glass opening dimensions will vary depending on prefit door size
***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass
#Panel dimensions will vary depending on prefit door size
Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size

Rev. 3/11

VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS
1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025