# STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6"
Bottom Rail: 10" Lock Rail: 8 3/4"

*Non-Rated Only
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ Heritage ☐ Artistry

☐ **SS7021**

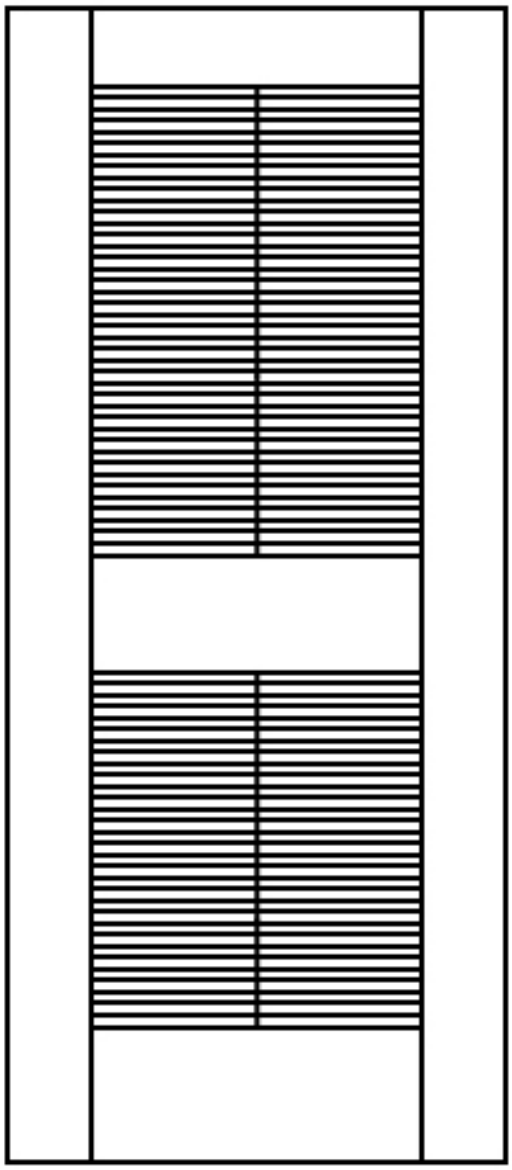

**Dimensions**

☐ Standard - see above
☐ Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

**Sticking**

**Heritage Collection**
- ☐ H1-Ovolo
- ☐ H2-Square
- ☐ H3-Ogee – Not available on 1 3/8" thick doors
- ☐ Other – Supply Drawing

**Artistry Collection**
- ☐ A1
- ☐ A2
- ☐ A3
- ☐ A4
- ☐ A5
- ☐ A6
- ☐ A7
- ☐ Other- Supply Drawing

**Louver**

☐ Chevron (Inverted V) – Standard#
☐ Round Slat (Flat Slat)** - Blind side outside
☐ Round Slat (Flat Slat)** - Blind side inside
☐ Louver by Other – Cutout only

#Center vertical muntin required if prefit width of louver is greater than 16"
**Round Slat Louvers are outsourced and will be supplied with vendor's standard sticking – Contact VT if further clarification is needed
Dimensions are to cutout (do not include sticking height). Louver dimensions will vary depending on prefit door size



VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS
1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025