



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"  
    Bottom Rail: 10"                      Glass Thickness: 1/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

**SS3011**     **SA3011**     **SR3011**

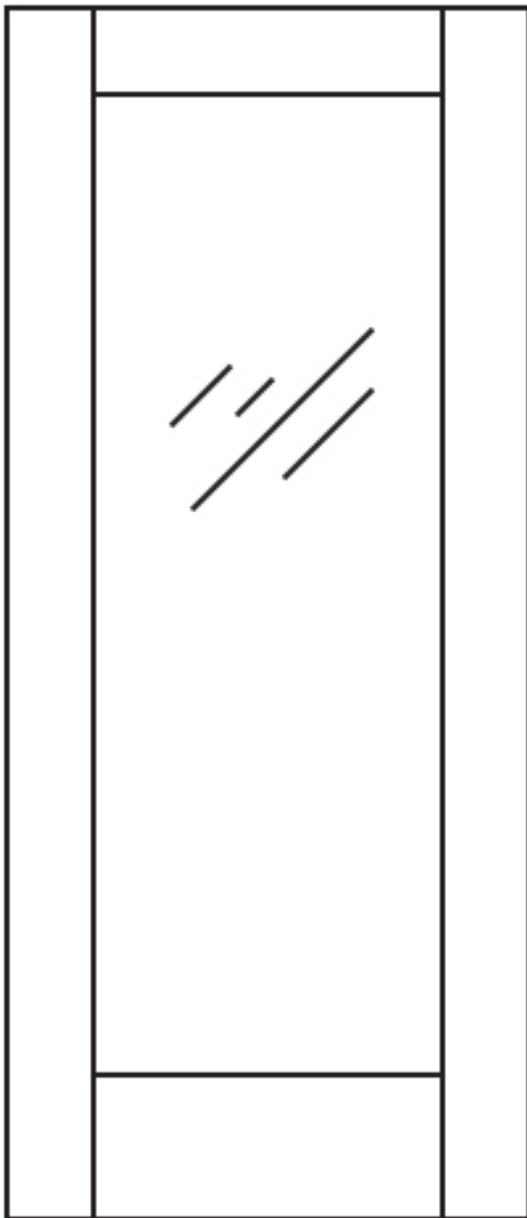

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	<input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass