STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6” Stile: 6” Glass Thickness: 1/4”
Bottom Rail: 10” Lock Rail: 8 3/4”

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ **SS3021** ☐ **SA3021** ☐ **SR3021**

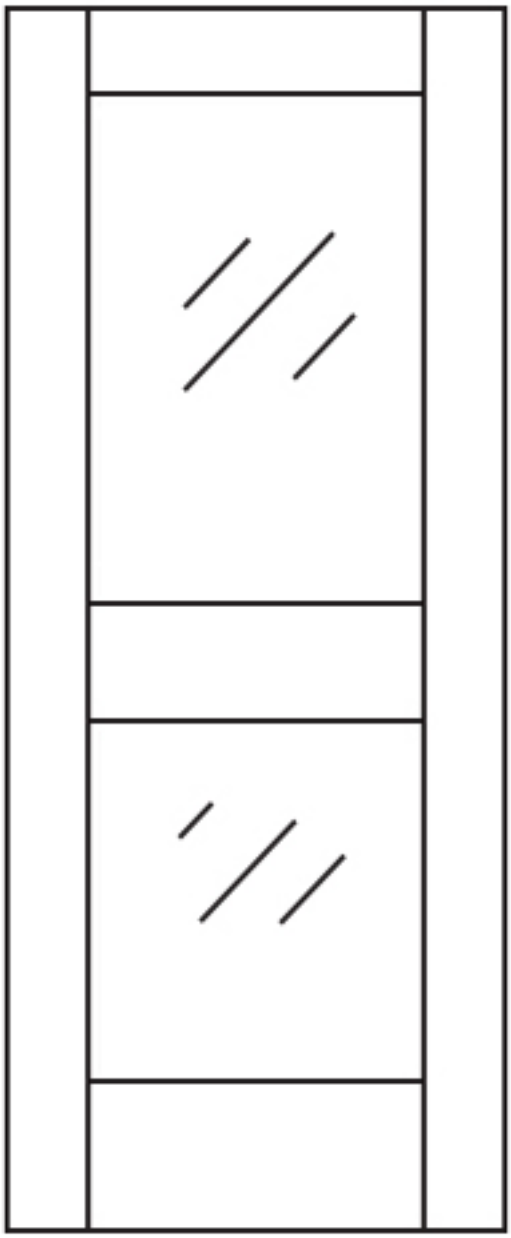

Dimensions

☐ Standard - see above
☐ Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Sticking

☐ Ovolo
☐ Square
☐ Ogee
☐ Other – Supply Drawing

Glass**

Supplied By:	Thickness/Type
☐ VT ☐ Other	☐ 1/4” Tempered*** ☐ 3/16” Clear Firelight® ☐ 1/4” Wire ☐ Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13”, glass will be substituted with laminated safety glass

Rev. 08/07

VT INDUSTRIES INC. 1000 INDUSTRIAL PARK
ARCHITECTURAL WOOD DOORS P.O. BOX 490
800.827.1615 HOLSTEIN, IA 51025
WWW.VTINDUSTRIES.COM/DOORS