



STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Glass Thickness: 1/4"
 Bottom Rail: 10" Muntin: 1/2"

* Non-Rated Only

SS3032 **SA3032** **SR3032**

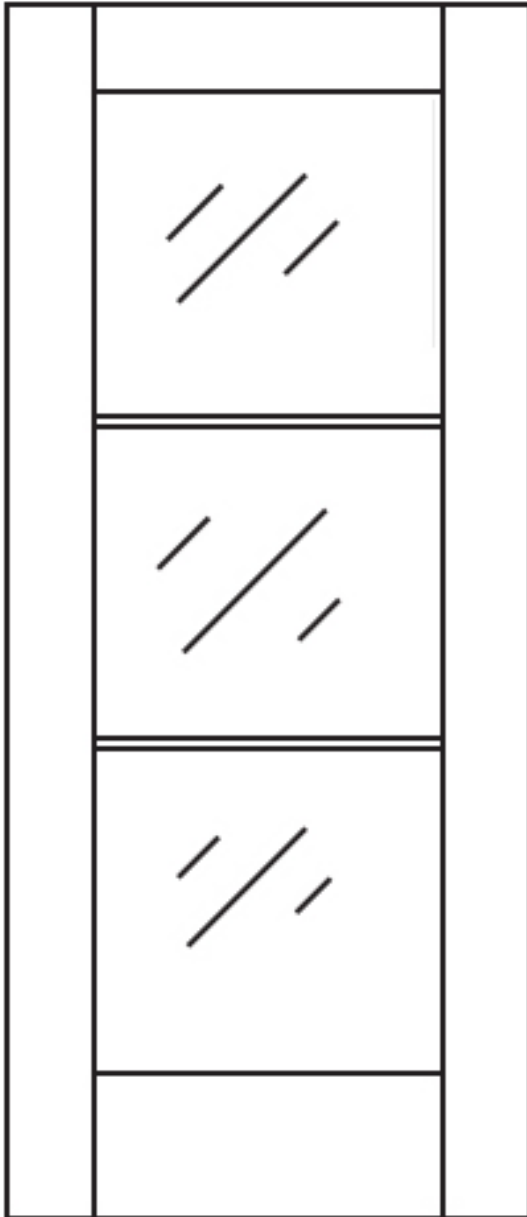

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Glass Opening Dimensions are Equal

Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

Glass**

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass