STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6” Stile: 6” Glass Thickness: 1/4”
Bottom Rail: 10” Muntin: 1/2”

*Non-Rated Only

☐ **SS3042**

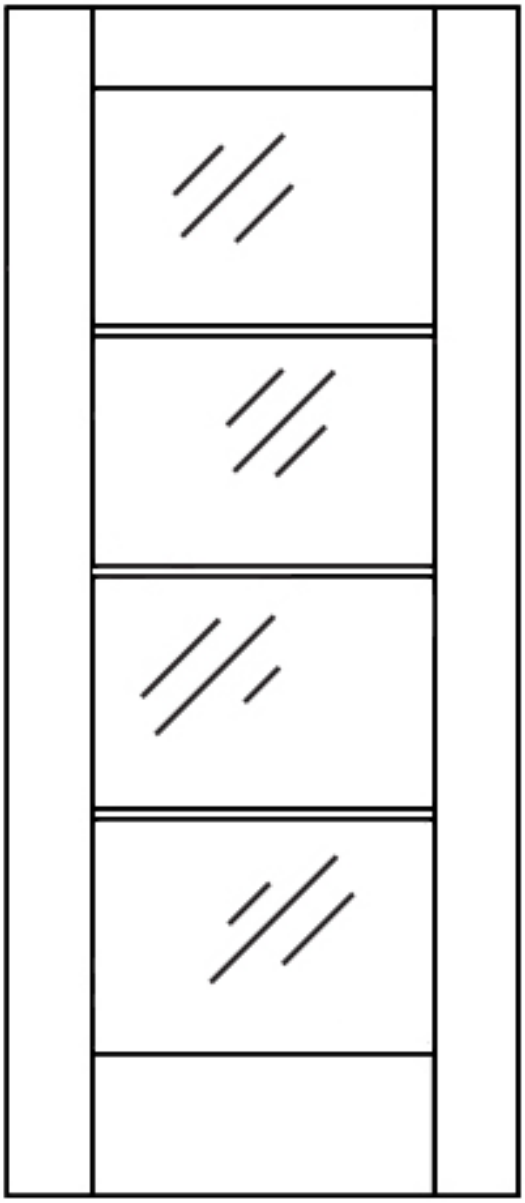

Dimensions

☐Standard - see above
☐Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Glass Opening Dimensions are Equal

Sticking

☐Ovolo
☐Square
☐Ogee
☐Other – Supply Drawing

Glass**

Supplied By:	Thickness/Type
☐ VT ☐ Other	☐ 1/4” Tempered*** ☐ 1/4” Wire ☐ Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13”, glass will be substituted with laminated safety glass

Rev. 08/07

VT INDUSTRIES INC. 1000 INDUSTRIAL PARK
ARCHITECTURAL WOOD DOORS P.O. BOX 490
800.827.1615 HOLSTEIN, IA 51025
WWW.VTINDUSTRIES.COM/DOORS