STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6” Stile: 6”
Bottom Rail: 10” Mid Rail: 3”

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
(C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ **SS1031** ☐ **SA1031** ☐ **SC1031** ☐ **SR1031** ☐ **AA1031** ☐ **RR1031**

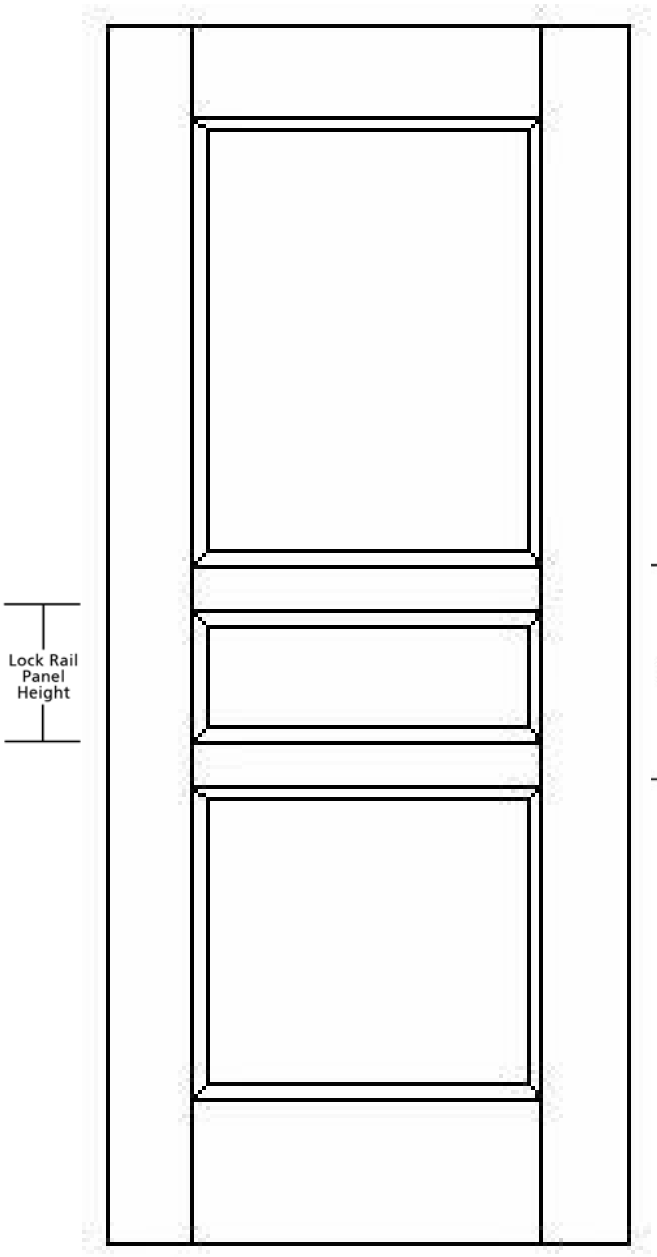

Dimensions

☐Standard - see above
☐Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Mid Rail: _____

C/L of Lock Rail Assembly from TOD: _____

Lock Rail Panel Height: _____
(Standard Lock Rail Panel Height is 8”)

Sticking

☐Ovolo
☐Square
☐Ogee
☐Other – Supply Drawing

Panels[##]

☐Raised
☐Flat

Glass (Advise which panels are glass)**

Supplied By:	Thickness/Type
☐ VT ☐ Other ☐ N/A	☐ 1/4” Tempered*** ☐ 3/16” Clear Firelight® ☐ 1/4” Wire ☐ Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13”, glass will be substituted with laminated safety glass

[##]Panel dimensions not specified will vary depending on prefit door size

VT INDUSTRIES INC. 1000 INDUSTRIAL PARK
ARCHITECTURAL WOOD DOORS P.O. BOX 490
800.827.1615 HOLSTEIN, IA 51025
WWW.VTINDUSTRIES.COM/DOORS

Rev. 08/07