



STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Mid Rail: 3"
Bottom Rail: 10" Mullion: 3" Lock Rail: 8 3/4"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

SS1041

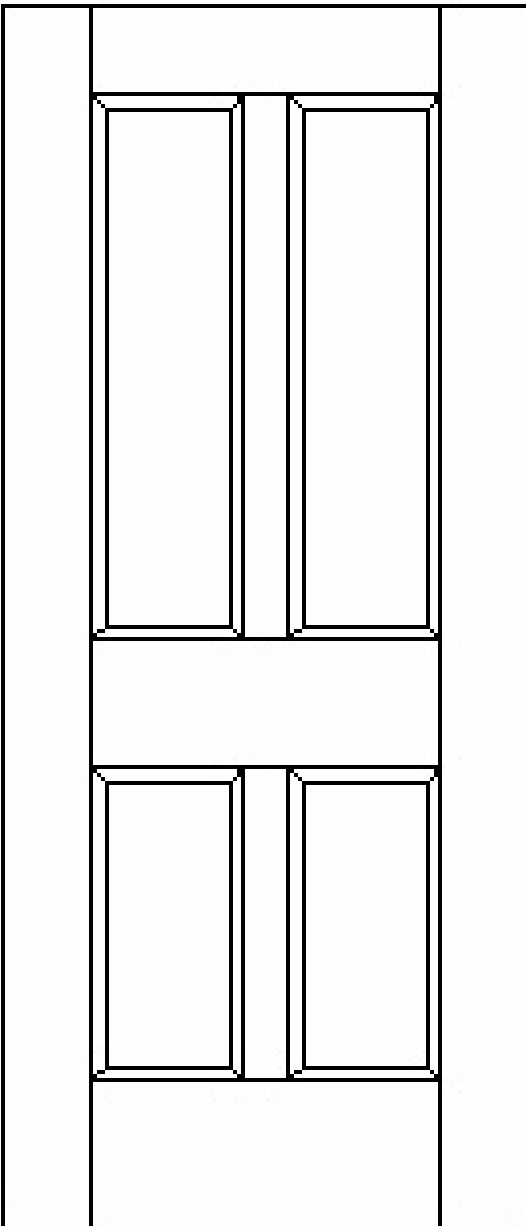

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Mullion: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

Panels[#]

- Raised
- Flat

Glass** (Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other <input type="checkbox"/> N/A	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight® <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

[#]Panel dimensions will vary depending on prefit door size