STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6” Stile: 6”
Bottom Rail: 10” Mid Rail: 3”

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

☐ **SS1042** ☐ **SA1042** ☐ **SR1042**

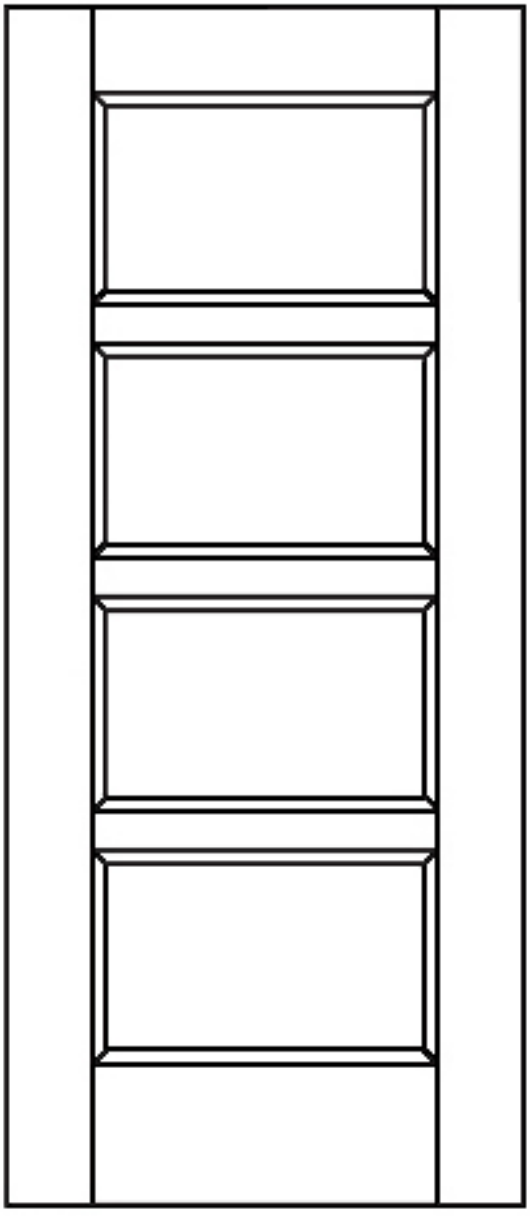

Dimensions

☐ Standard - see above
☐ Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Mid Rail: _____

Panel Dimensions are Equal

Sticking

☐ Ovolo
☐ Square
☐ Ogee
☐ Other – Supply Drawing

Panels#

☐ Raised
☐ Flat

Glass ** (Advise which panels are glass)

Supplied By:	Thickness/Type
☐ VT ☐ Other ☐ N/A	☐ 1/4” Tempered*** ☐ 3/16” Clear Firelight® ☐ 1/4” Wire ☐ Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13”, glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size

Rev. 08/07

VT INDUSTRIES INC. 1000 INDUSTRIAL PARK
ARCHITECTURAL WOOD DOORS P.O. BOX 490
800.827.1615 HOLSTEIN, IA 51025
WWW.VTINDUSTRIES.COM/DOORS