



## STILE & RAIL DOOR ELEVATIONS


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Mid Rail: 3"  
Bottom Rail: 10" Mullion: 3"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
 (C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

**SS1061**

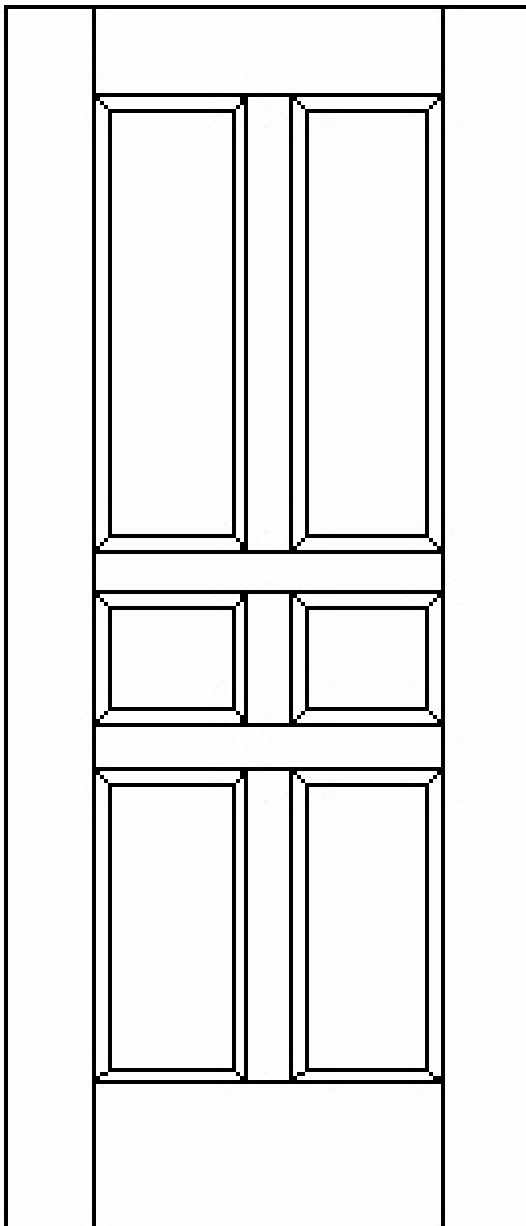

### Dimensions

- Standard – see above
- Custom – fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Mid Rail: \_\_\_\_\_

C/L of Lock Rail Assembly from TOD: \_\_\_\_\_

Lock Rail Panel Height: \_\_\_\_\_  
 (Standard Lock Rail Panel Height is 8")

### Sticking

- Ovolo
- Square
- Ogee
- Other – Supply Drawing

### Panels<sup>##</sup>

- Raised
- Flat

### Glass\*\* ( Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size  
 \*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass  
 ##Panel dimensions not specified will vary depending on prefit door size

Lock Rail Panel Height

C/L Lock Rail Assembly