STILE & RAIL DOOR ELEVATIONS -1021

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6"
Bottom Rail: 10" Lock Rail: 8 3/4"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ Heritage

☐ **SS1021** ☐ **SA1021** ☐ **SC1021** ☐ **SR1021** ☐ **AA1021** ☐ **RR1021**

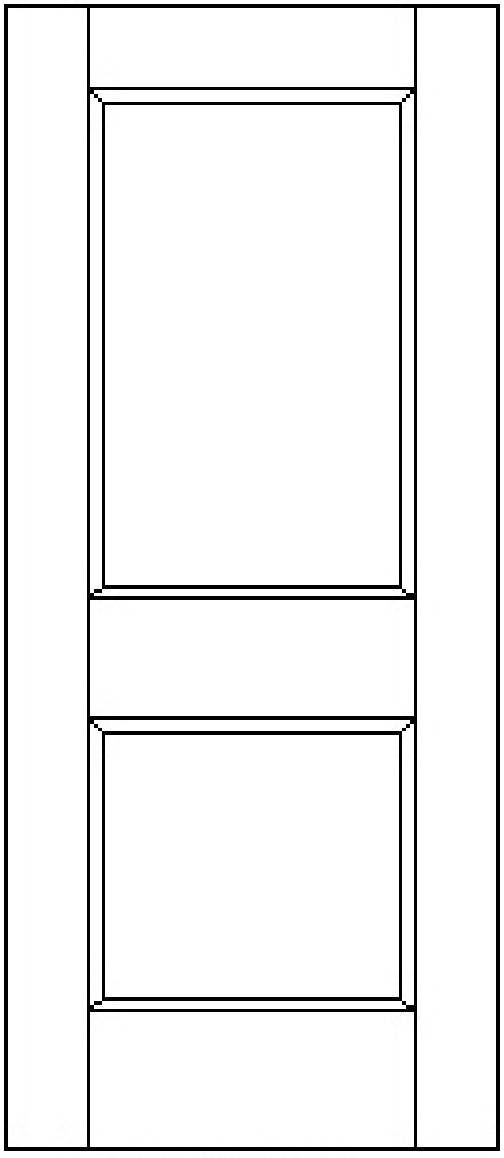

Dimensions

☐ Standard - see above
☐ Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Sticking

Heritage Collection

☐ Ovolo
☐ Square
☐ Ogee
☐ Mission
☐ Classic
☐ Other – Supply Drawing

Panels#

☐ Raised ☐ Step
☐ Flat

#Panel dimensions will vary depending on prefit door size

Dimensions are to cutout (do not include sticking height). Panel dimensions will vary depending on prefit door size.

Rev. 12/17

VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS
1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025