



STILE & RAIL DOOR ELEVATIONS -1031

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6"
Bottom Rail: 10" Mid Rail: 3-5/8"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
 (C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage

- SS1031**
 SA1031
 SC1031+
 SR1031
 AA1031
 RR1031

Dimensions

- Standard - see above
 Custom - fill in below

Top Rail: _____ Bottom Rail: _____

Hinge and Lock Stiles: _____ Mid Rail: _____

C/L of Lock Rail Assembly from TOD: _____

Lock Rail Panel Height: _____
 (Standard Lock Rail Panel Height is 8")

Sticking

Heritage Collection

- Ovolo
 Square
 Ogee
 Mission
 Classic
 Other- Supply Drawing

Panels**

- Raised Step
 Flat

Glass** (Advise which panels are glass)


Supplied By:	Thickness/Type
<input type="checkbox"/> VT <input type="checkbox"/> Other <input type="checkbox"/> N/A	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 3/16" Clear Firelight® <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

**Panel dimensions not specified will vary depending on prefit door size
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size

+Not available with glass panels

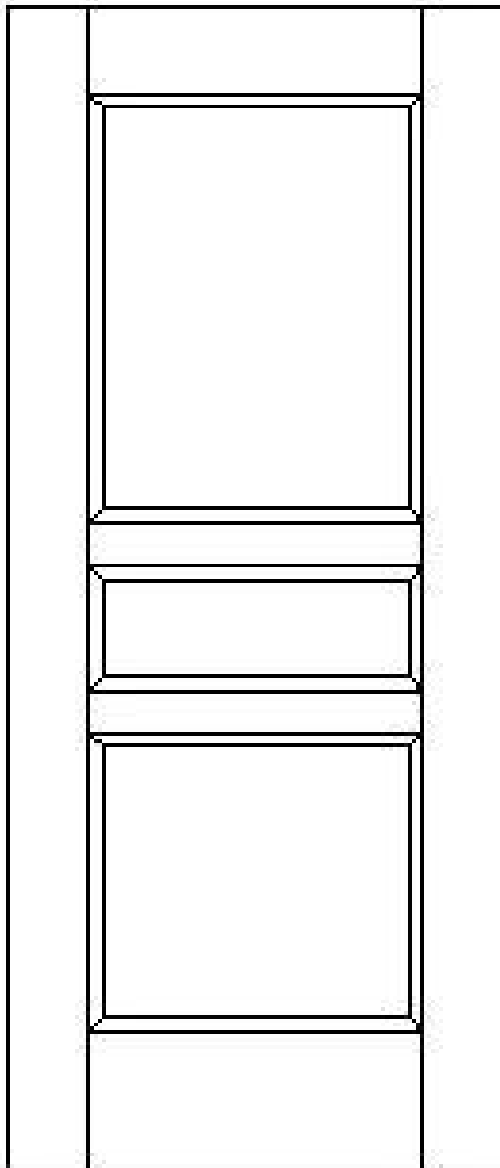

Lock Rail Panel Height

C/L Lock Rail Assembly