VT INDUSTRIES

STILE & RAIL DOOR ELEVATIONS -1032

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6"
Bottom Rail: 10" Mid Rail: 3-5/8"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

☐ Heritage

☐ **SS1032** ☐ **SA1032** ☐ **SC1032**[+] ☐ **SR1032** ☐ **AA1032**

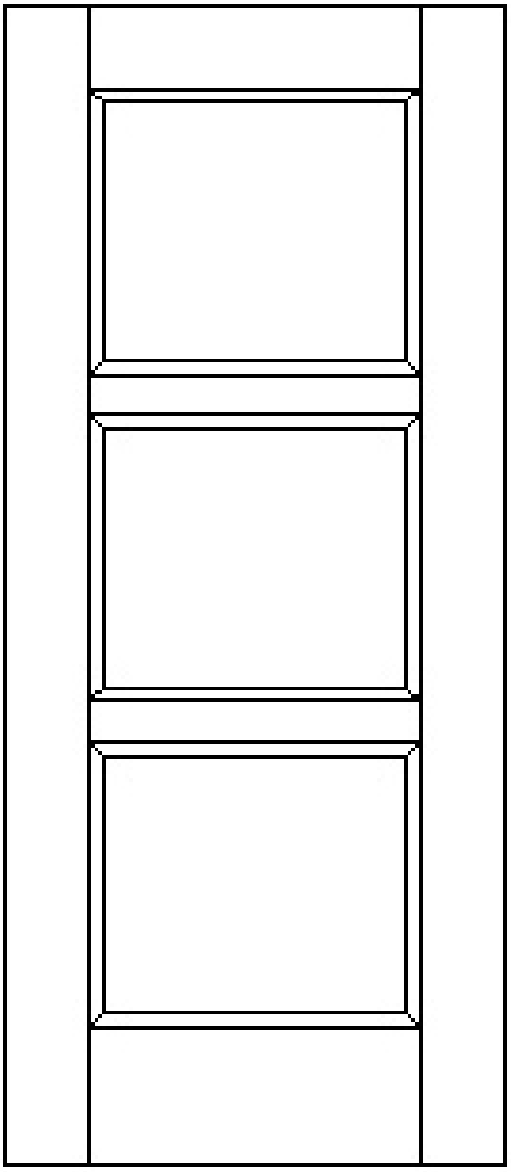

Dimensions

☐ Standard - see above
☐ Custom - fill in below

Top Rail: _____ Bottom Rail: _____

Hinge and Lock Stiles: _____ Mid Rail: _____

Mid Rail: _____

Panel Dimensions are Equal

Sticking

Heritage Collection

☐ Ovolo
☐ Square
☐ Ogee
☐ Mission
☐ Classic
☐ Other- Supply Drawng

Panels[#]

☐ Raised ☐ Step
☐ Flat

Glass (Advise which panels are glass)**

Supplied By:	Thickness/Type
☐ VT ☐ Other ☐ N/A	☐ 1/4" Tempered*** ☐ 3/16" Clear Firelight® ☐ 1/4" Wire ☐ Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

[#]Panel dimensions will vary depending on prefit door size
Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size
+Not available with glass panels

Rev. 12/17

VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS
1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025