



## STILE & RAIL DOOR ELEVATIONS -1033

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Mullion: 3-5/8"  
    Bottom Rail: 10"                      Lock Rail: 8 3/4"


(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage

**SS1033**     **SA1033**     **SC1033<sup>+</sup>**     **SR1033**     **AA1033**     **RR1033**

**Dimensions**

- Standard - see above
- Custom - fill in below

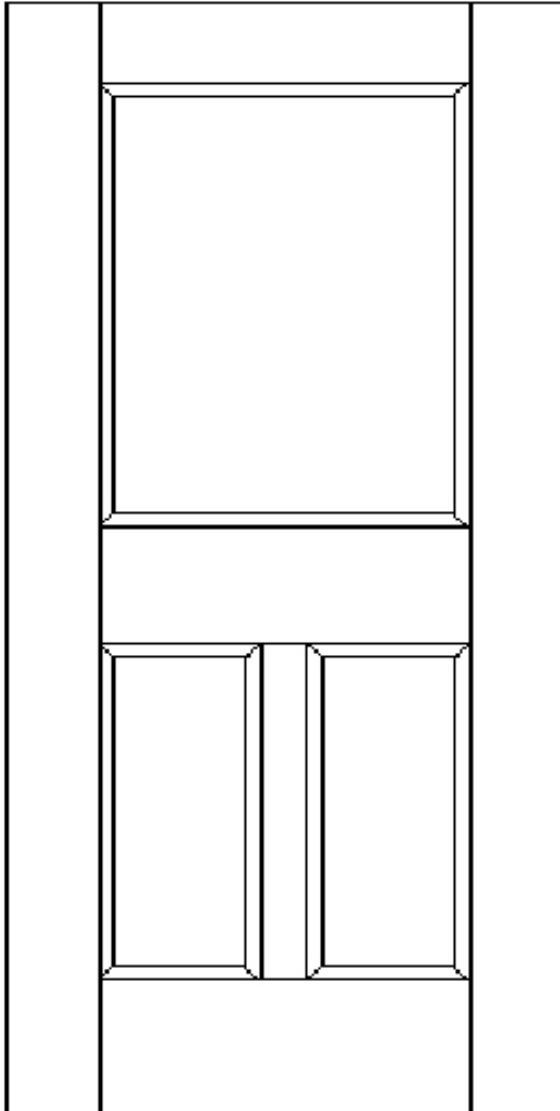

Top Rail: \_\_\_\_\_ Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_ Mullion: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_ Lock Rail: \_\_\_\_\_

**Sticking**

**Heritage Collection**

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other- Supply Drawing

**Panels<sup>†</sup>**

- Raised     Step
- Flat

**Glass\*\* (Advise which panels are glass)**

Supplied By:	Thickness/Type
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size  
 \*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass  
 #Panel dimensions will vary depending on prefit door size  
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size  
 +Not available with glass panels