



STILE & RAIL DOOR ELEVATIONS -1041

JOB NUMBER: _____ PAGE: _____ / _____


JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Mid Rail: 3-5/8"
 Bottom Rail: 10" Mullion: 3" Lock Rail: 8 3/4"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage

SS1041

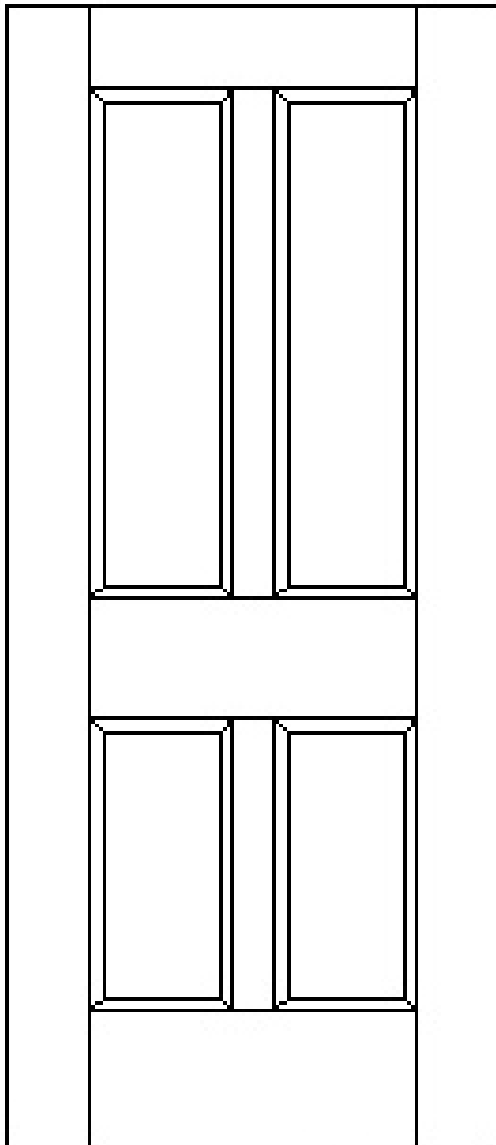

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____ Bottom Rail: _____
 Hinge and Lock Stiles: _____ Mullion: _____
 C/L of Lock Rail from TOD: _____ Lock Rail: _____

Sticking

Heritage Collection

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other – Supply Drawing

Panels[#]

- Raised Step
- Flat

Glass** (Advise which panels are glass)

Supplied By:	Thickness/Type
<input type="checkbox"/> VT <input type="checkbox"/> Other <input type="checkbox"/> N/A	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 3/16" Clear Firelight® <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

*Panel dimensions will vary depending on prefit door size
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size