



STILE & RAIL DOOR ELEVATIONS -1061

JOB NUMBER: _____ PAGE: _____ / _____


JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Mid Rail: 3-5/8"
 Bottom Rail: 10" Mullion: 3-5/8"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
 (C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage

SS1061

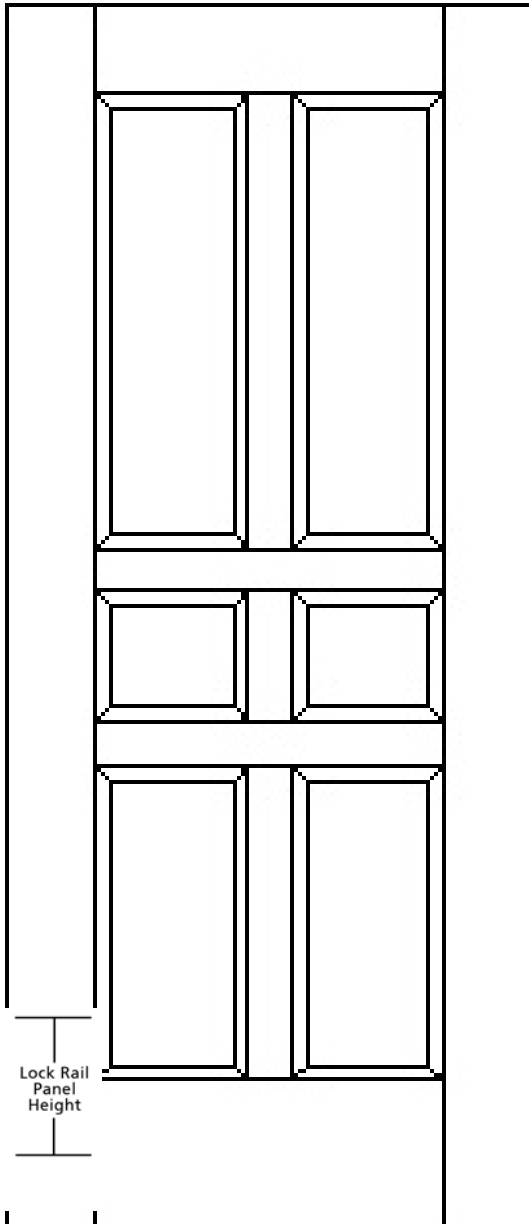

Dimensions

Standard – see above

Custom – fill in below

Top Rail: _____ Bottom Rail: _____

Hinge and Lock Stiles: _____ Mullion: _____

Mid Rail: _____

C/L of Lock Rail Assembly from TOD: _____

Lock Rail Panel Height: _____
 (Standard Lock Rail Panel Height is 8")

Sticking

Heritage Collection

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other- Supply Drawing

Panels[#]

- Raised Step
- Flat

Glass** (Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	<input type="checkbox"/> 3/16" Clear Firelight®
	<input type="checkbox"/> Other: _____	

Lock Rail Assembly

C/L _____

Opening dimensions will vary depending on prefit door size
 Panel dimension of tempered glass is less than 13", glass will be
 supplied with laminated safety glass
 Panel dimensions not specified will vary depending on prefit door size
 Panel dimensions are to cutout (do not include sticking height). Panel and glass
 dimensions will vary depending on prefit door size