



## STILE & RAIL DOOR ELEVATIONS - 1062

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_


JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Mid Rail: 3-5/8"  
    Bottom Rail: 10"                      Mullion: 3-5/8"                      Lock Rail: 8 3/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage

**SS1062**

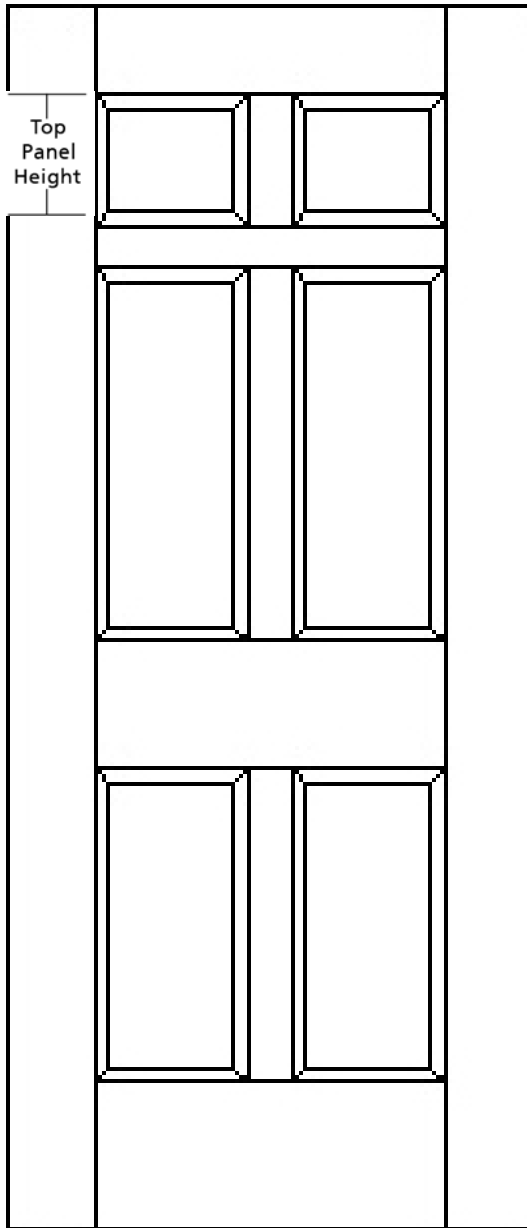

### Dimensions

- Standard - see above  
 Custom - fill in below

Top Rail: \_\_\_\_\_ Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_ Mid Rail: \_\_\_\_\_

Top Panel Height: \_\_\_\_\_ Lock Rail: \_\_\_\_\_  
 (Standard Top Panel Height is 8")

C/L of Lock Rail from TOD: \_\_\_\_\_

### Sticking

#### Heritage Collection

- Ovolo  
 Square  
 Ogee  
 Mission  
 Classic  
 Other- Supply Drawing

### Panels<sup>##</sup>

- Raised  Step  
 Flat

### Glass \*\* (Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other <input type="checkbox"/> N/A	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____	<input type="checkbox"/> 3/16" Clear Firelight®

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

<sup>##</sup>Panel dimensions not specified will vary depending on prefit door size  
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size