



STILE & RAIL DOOR ELEVATIONS -1063


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Lock Rail: 8 3/4"
 Bottom Rail: 10" Mullion: 3-5/8"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage **SS1063**

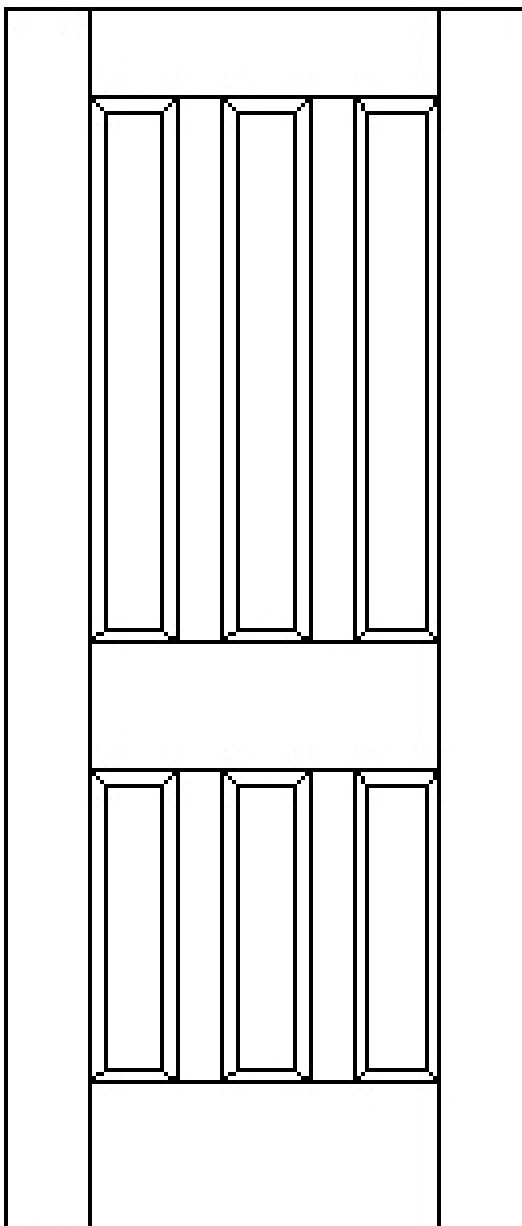

- Standard - see above
- Custom- fill in below

Top Rail: _____

Dimensions

Bottom Rail: _____

Hinge and Lock Stiles: _____

Mullion: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Sticking

Heritage Collection

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other- Supply Drawing

Panels#

- Raised
- Flat Step

Glass** (Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____	

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size

Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size