



STILE & RAIL DOOR ELEVATIONS – 1081

JOB NUMBER: _____ PAGE: _____ / _____


JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Mid Rail: 3-5/8"
 Bottom Rail: 10" Mullion: 3-5/8"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

Heritage

SS1081

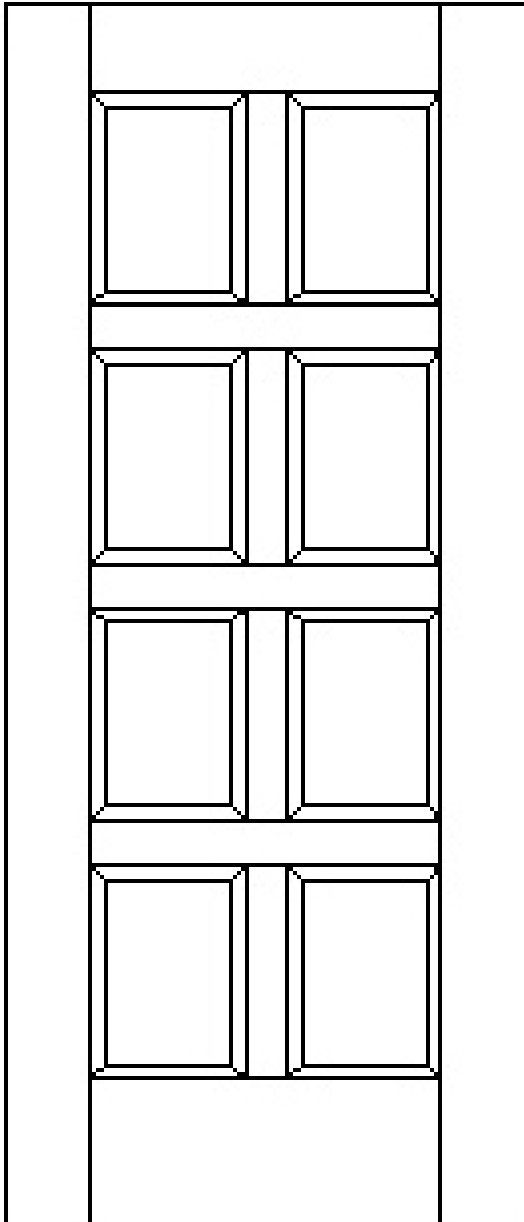

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____ Bottom Rail: _____
 Hinge and Lock Stiles: _____ Mullion: _____
 Mid Rail: _____
 Panel Dimensions are Equal

Sticking

Heritage Collection

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other- Supply Drawing

Panels[#]

- Raised Step
- Flat

Glass** (Advise which panels are glass)

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____	

**Glass opening dimensions will vary depending on prefit door size
 ***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

[#]Panel dimensions will vary depending on prefit door size
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size