



STILE & RAIL DOOR ELEVATIONS -1091


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Mid Rail: 3-5/8"
Bottom Rail: 10" Mullion: 3-5/8"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

- Heritage SS1091

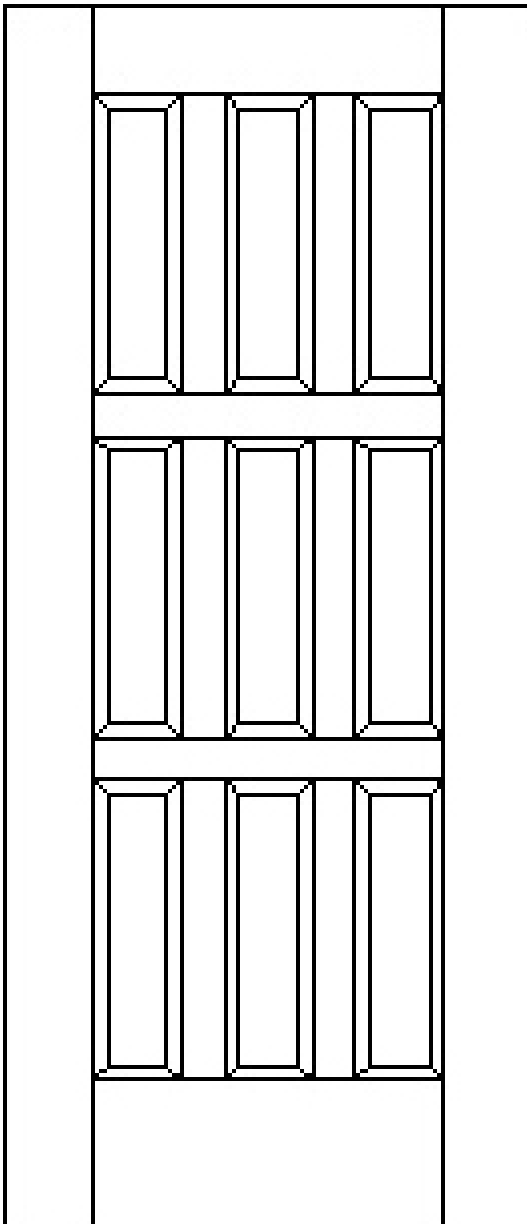

Dimensions

- Standard - see above
 Custom - fill in below

Top Rail: _____ Bottom Rail: _____

Hinge and Lock Stiles: _____ Mullion: _____

Mid Rail: _____
Panel Dimensions are Equal

Sticking

Heritage Collection

- Ovolo
 Square
 Ogee
 Mission
 Classic
 Other Supply Drawing

Panels[#]

- Raised Step
 Flat

Glass ** (Advise which panels are glass)

Supplied By:	Thickness/Type
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 3/16" Clear Firelight [®]
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> N/A	<input type="checkbox"/> Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

[#]Panel dimensions will vary depending on prefit door size
Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size