



## STILE & RAIL DOOR ELEVATIONS -3011


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"  
    Bottom Rail: 10"                      Glass Thickness: 1/4"

\* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.

- Heritage                       **SS3011**     **SA3011**     **SR3011**

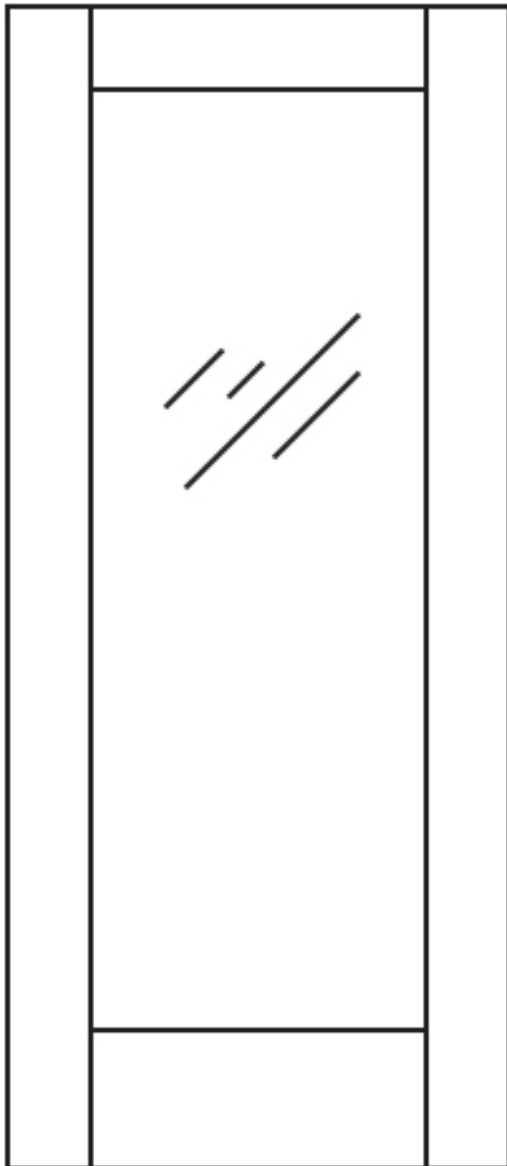

### Dimensions

- Standard - see above  
 Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

### Sticking

#### Heritage Collection

- Ovolo  
 Square  
 Ogee  
 Mission  
 Classic  
 Other- Supply Drawing

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 3/16" Clear Firelight®
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire	
	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

Dimensions are to cutout (do not include sticking height). Glass dimensions will vary depending on prefit door size