



## STILE & RAIL DOOR ELEVATIONS - 3101

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_


JOB NAME: \_\_\_\_\_

STANDARDS:\*                      Top Rail: 6"                      Stile: 6"                      Glass Thickness: 1/4"  
    Bottom Rail: 10"                      Muntin: 1/2"

\*Non-Rated Only

Heritage

**SS3101**

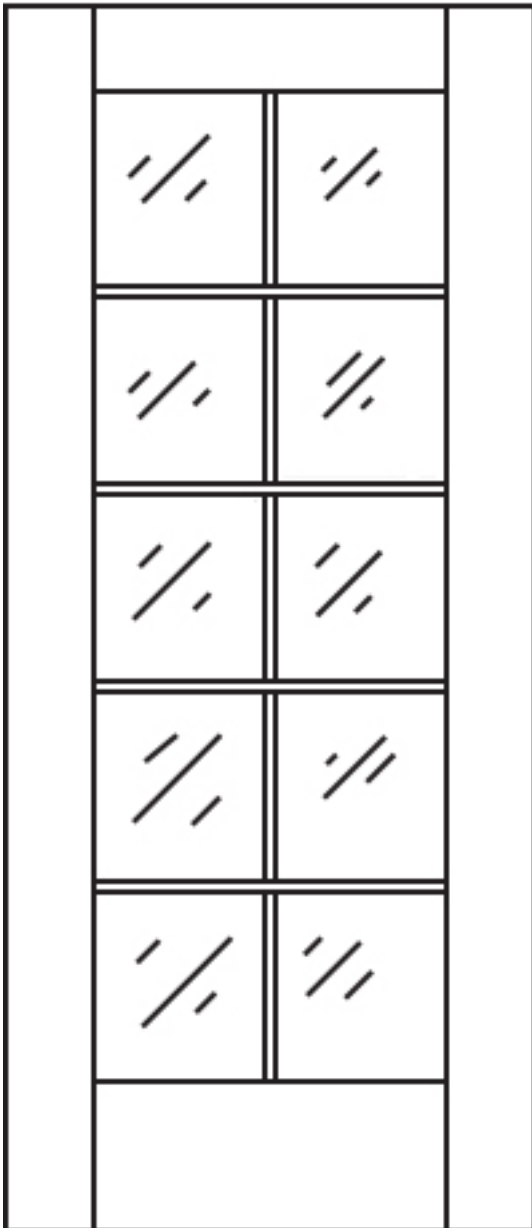

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Glass Opening Dimensions are Equal

### Sticking

### Heritage Collection

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other- Supply Drawing

### Glass\*\*

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

Dimensions are to cutout (do not include sticking height). Glass dimensions will vary depending on prefit door size