



STILE & RAIL DOOR ELEVATIONS -5031


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Mullion: 3-5/8"
 Bottom Rail: 10" Lock Rail: 8 3/4" Glass Thickness: 1/4"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

- Heritage SS5031 SA5031 SR5031

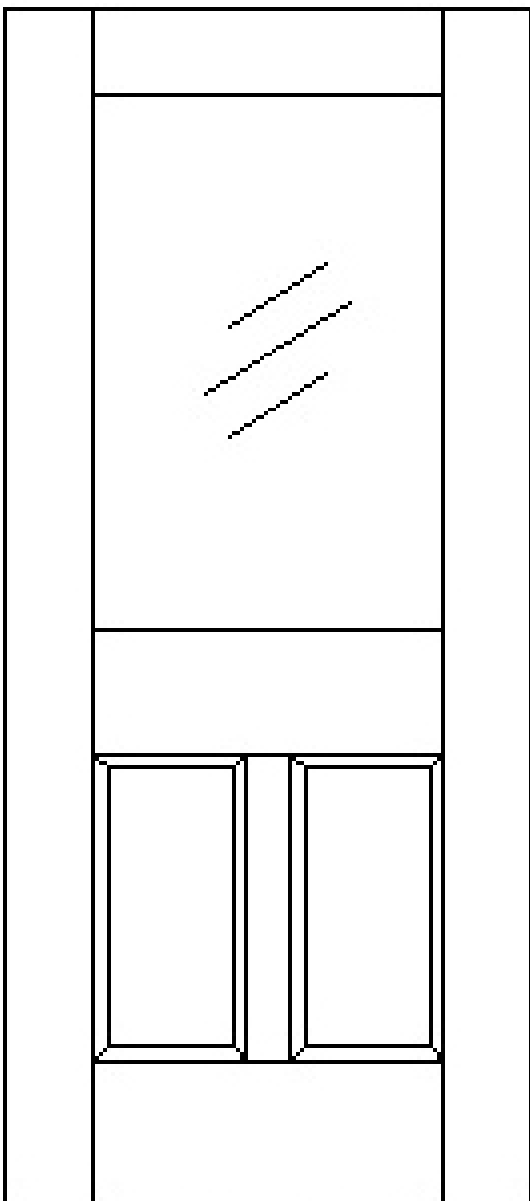

Dimensions

- Standard – see above
 Custom – fill in below
- Top Rail: _____ Bottom Rail: _____
- Hinge and Lock Stiles: _____ Mullion: _____
- C/L of Lock Rail from TOD: _____ Lock Rail: _____
- Panel dimensions are equal

Sticking

Heritage Collection

- Ovolo
 Square
 Ogee
 Mission
 Classic
 Other – Supply Drawing

Panels[#]

- Raised Step
 Flat

Glass**

Supplied By:	Thickness/Type
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 3/16" Clear Firelight [*]
<input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

**Glass opening dimensions will vary depending on prefit door size
 ***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass
[#]Panel dimensions will vary depending on prefit door size
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size