STILE & RAIL DOOR ELEVATIONS – 5041

JOB NUMBER:_____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6” Bottom Rail: 10” Stile: 6” Mullion: 3-5/8” Glass Thickness: 1/4”

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
(C/L of Lock Rail Assembly will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ Heritage

☐ **SS5041** ☐ **SA5041** ☐ **SR5041**

Dimensions

☐ Standard - see above
☐ Custom - fill in below

Top Rail:_____ Bottom Rail: _____

Hinge and Lock Stiles:_____ Mullion: _____

C/L of Lock Rail Assembly from TOD:_____ Mid Rail: _____

Lock Rail Panel Height: _____
(Standard Lock Rail Panel Height is 8”)
Bottom Panel dimensions are equal

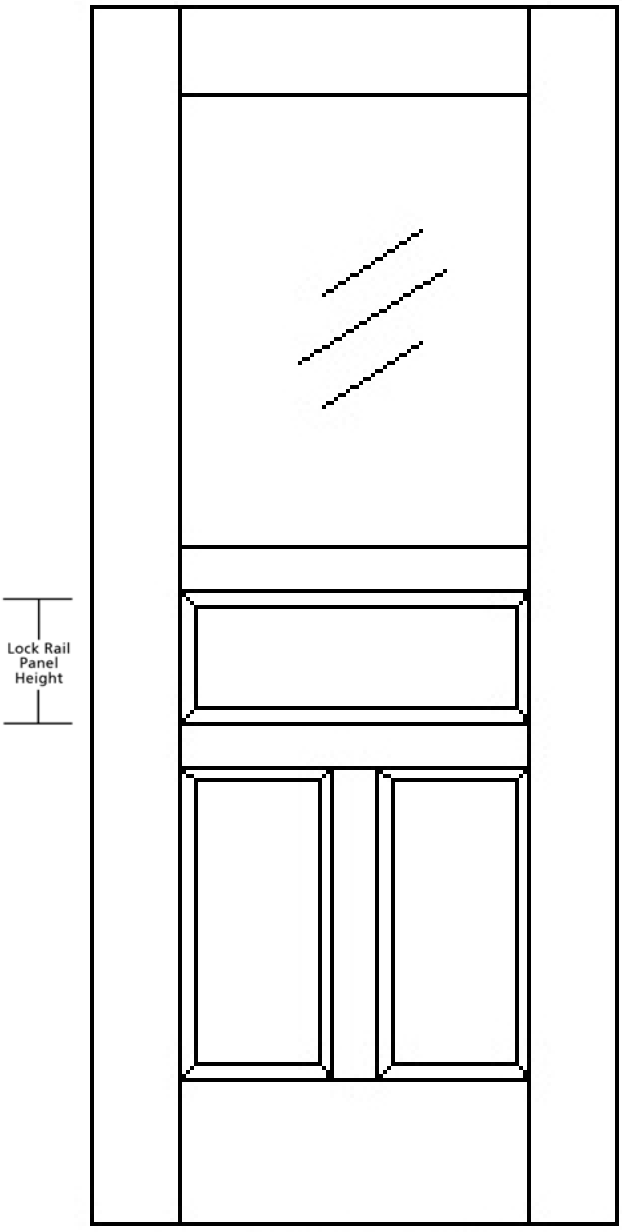

Sticking

☐ Ovolo
☐ Square
☐ Ogee
☐ Mission
☐ Classic
☐ Other- Supply Drawing

Panels

☐ Raised
☐ Flat
☐ Step

Glass**

Supplied By:	Thickness/Type	
☐ VT	☐ 1/4” Tempered***	☐ 3/16” Clear Firelight®
☐ Other	☐ 1/4” Wire	
	☐ Other:	

**Glass opening dimensions will vary depending on prefit door size

*** If diagonal dimension of tempered glass is less than 13”, glass will be substituted with laminated safety glass

Panel dimensions not specified will vary depending on prefit door size
Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size

VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS

1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025