



STILE & RAIL DOOR ELEVATIONS -5071


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Lock Rail: 8 3/4"
Bottom Rail: 10" Muntin: 1/2" Glass Thickness: 1/4"

* Non-Rated Only
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage **SS5071**

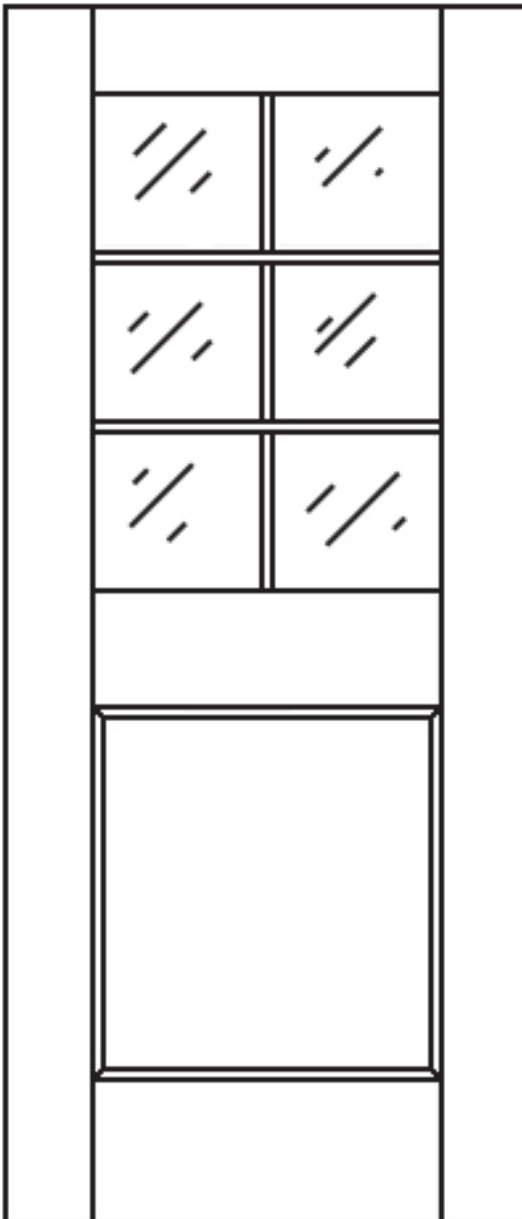

Standard - see above
 Custom - fill in below

Dimensions

Top Rail: _____
 Bottom Rail: _____
 Hinge and Lock Stiles: _____
 Mullion: _____
 Mid Rail: _____
 Lock Rail: _____

C/L of Lock Rail from TOD: _____
 Glass Opening Dimensions are Equal

Sticking

Heritage Collection

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other- Supply Drawing

Panels#

- Raised Step
- Flat

Glass**

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> Other	<input type="checkbox"/> Other: _____	

**Glass opening dimensions will vary depending on prefit door size
 ***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass
 #Panel dimensions will vary depending on prefit door size
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size