



STILE & RAIL DOOR ELEVATIONS -5101

JOB NUMBER: _____ PAGE: _____ / _____


JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Muntin: 1/2"
Bottom Rail: 10" Lock Rail: 8 3/4" Glass Thickness: 1/4"

*Non-Rated Only
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

[] Heritage

[] SS5101

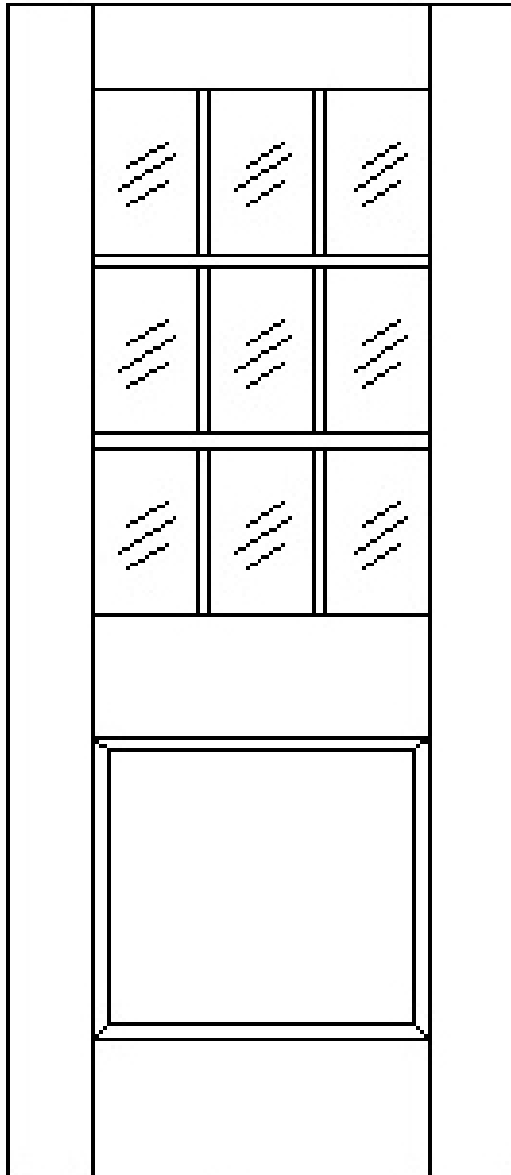

Dimensions

- [] Standard - see above
[] Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Glass Opening Dimensions are Equal

Sticking

Panels#

- [] Ovolo [] Raised
[] Square [] Flat
[] Ogee [] Step
[] Mission
[] Classic
[] Other - Supply Drawing

Glass**

Table with 2 columns: Supplied By, Thickness/Type. Includes options for VT, Other, 1/4" Tempered, and 1/4" Wire.

**Glass opening dimensions will vary depending on prefit door size
***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass
#Panel dimensions will vary depending on prefit door size Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size