



## STILE & RAIL DOOR ELEVATIONS - 5111


JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_

JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Muntin: 1/2"  
Bottom Rail: 10" Mullion: 3-5/8" Lock Rail: 8 3/4"  
Glass Thickness: 1/4"

\*Non-Rated Only  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage  SS5111

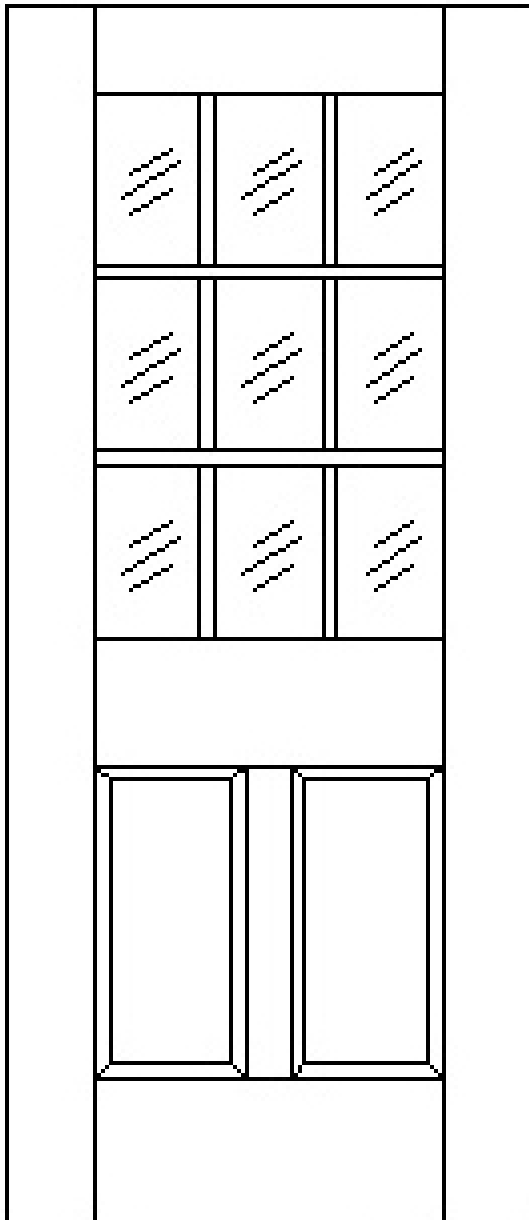

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Mullion: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

Panel Dimensions are Equal  
 Glass Opening Dimensions are Equal

### Sticking

#### Heritage Collection

- Ovolo
- Square
- Ogee
- Mission
- Classic
- Other- Supply Drawing

#### Panels

- Raised
- Flat
- Step

### Glass\*\*

Supplier By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> Other	<input type="checkbox"/> Other: _____	

\*\*Glass opening dimensions will vary depending on prefit door size

\*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size. Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size