

STILE & RAIL DOOR ELEVATIONS -7021


JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6"
Bottom Rail: 10" Lock Rail: 8 3/4"

*Non-Rated Only
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage **SS7021**

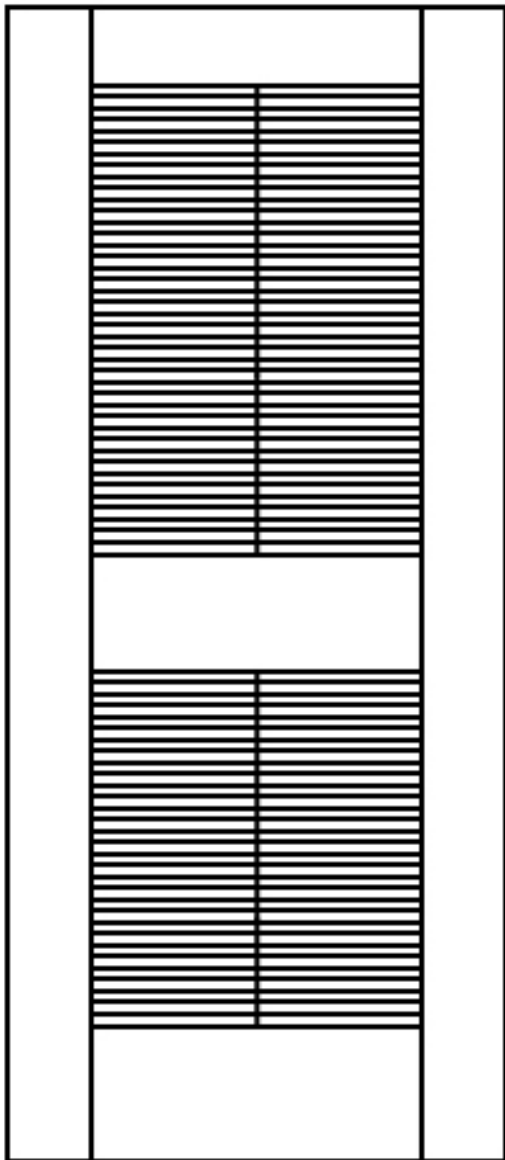

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Sticking

Heritage Collection

- Ovolo
- Square
- Ogee – 1-3/4" only
- Mission 1-3/4" only
- Classic – 1-3/4" only
- Other- Supply Drawing

Louver

- Chevron (Inverted V) – Standard[#] (no air flow)
- Flat Slat
- Louver by Other – Cutout only

[#]Center vertical muntin required if prefit width of louver is greater than 16"
Dimensions are to cutout (do not include sticking height). Louver dimensions will vary depending on prefit door size