STILE & RAIL DOOR ELEVATIONS -9022

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6” Stile: 6”
Bottom Rail: 10” Lock Rail: 8 3/4”

*Non-Rated Only
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ Heritage

☐ **SS9022** ☐ **SA9022** ☐ **SR9022**

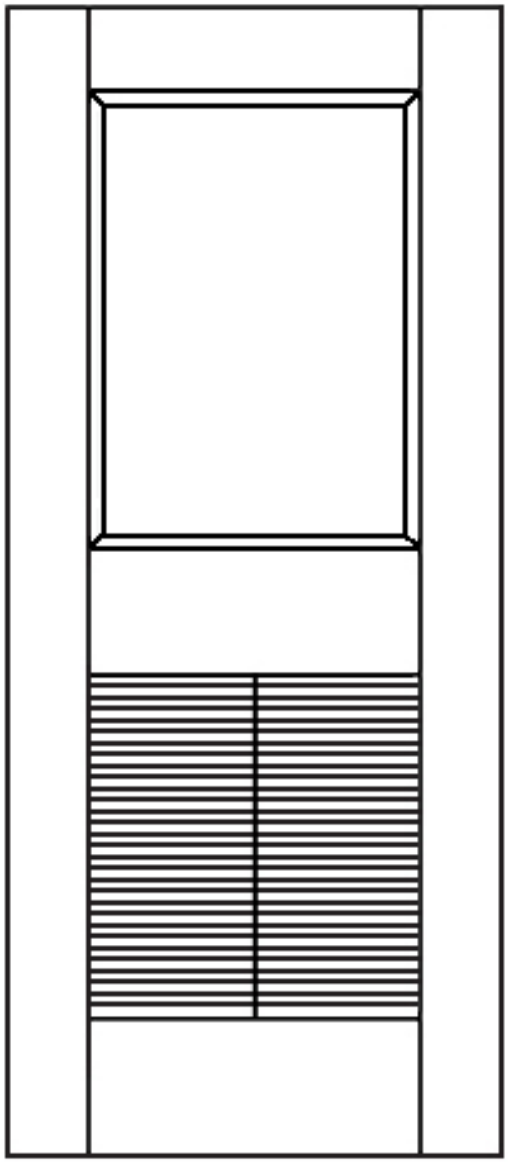

Dimensions

☐Standard - see above

☐Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Sticking

Heritage Collection
☐ Ovolo
☐ Square
☐ Ogee 1-3/4” only
☐ Mission 1-3/4” only
☐ Classic 1-3/4” only
☐ Other – Supply Drawing

Panels[##]
☐ Raised
☐ Flat
☐ Step

Louver

☐Chevron (Inverted V) – Standard[#]
☐Flat Slat**
☐Louver by Other – Cutout only

[#]Center vertical muntin required if prefit width of louver is greater than 16”
[##]Panel dimensions will vary depending on prefit door size

Dimensions are to cutout (do not include sticking height). Panel and louver dimensions will vary depending on prefit door size

Rev. 12/17

VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS
1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025