

INSTALLATION INSTRUCTIONS

Includes:

- DHSI AMDB3-3XSWE Adjustable mortise door bottom
- DHSI 105 "Cush 'N' Seal"
- DHSI DP-.375 Decibel plug (x2)


1. Install the DHSI AMDB3-3 Adjustable mortise door bottom in accordance with the manufacturer's instructions prior to hanging the door. **See drawing #1.**

2. Hang the door and adjust for proper clearances.


3. Prepare the frame by cleaning the jamb, header and stops where the DHSI 105 seal will be applied.

4. Measure, cut and apply the DHSI 105 seal to the frame jambs and header. **See drawing #2.** The DHSI 105 should be full opening width on the top, with the vertical legs extending from the top of the threshold and butted against the top strip. Use full-length pieces to avoid joint gaps.


5. Apply DHSI DP-.375 (x2) to bottom corners of jambs, adjacent to the DHSI 105 seal. The decibel plug should be sized as required during installation to 1-1/2" wide by the dimension between the top of the AMDB3-3 and the sill (undercut + AMDB3-3 mortise depth). **See drawing #3.**

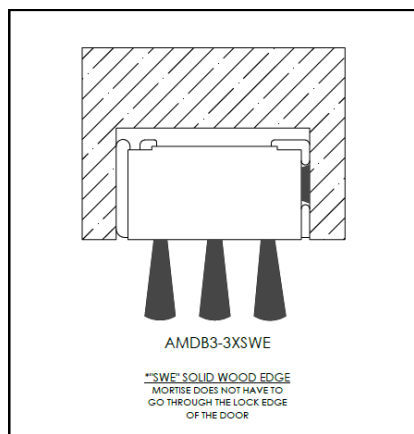

Drawing #1

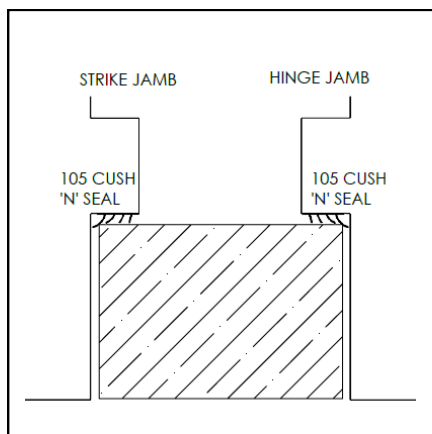

Drawing #2

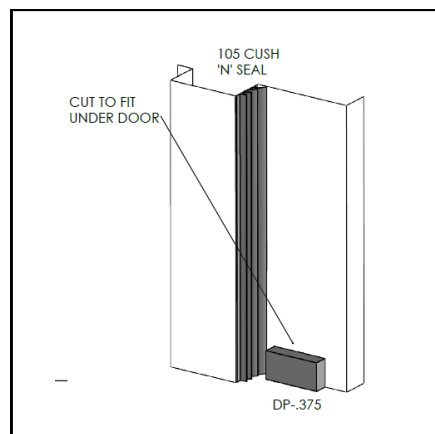

Drawing #3