

INSTALLATION INSTRUCTIONS

Includes:

- DHSI AMDB3-3 Adjustable mortise door bottom
- DHSI 105 "Cush 'N' Seal"
- DHSI SA-75 seal
- DHSI DP-.250 Decibel plug (x2)


1. Install the DHSI AMDB3-3 Adjustable mortise door bottom in accordance with the manufacturer's instructions prior to hanging the door. **See drawing #1.**

2. Hang the door and adjust for proper clearances.


3. Prepare the frame by cleaning the jamb, header and stops where the DHSI 105 and DHSI SA-75 seals will be applied.

4. Measure, cut and apply the DHSI 105 and DHSI SA-75 seals to the frame jambs and header. **See drawing #2.** The DHSI 105 and DHSI SA-75 seals should be full opening width on the top, with the vertical legs extending from the top of the threshold and butted against the top strip. Use full-length pieces to avoid joint gaps.


5. Apply DHSI DP-.250 (x2) to bottom corners of jambs, adjacent to the DHSI 105 seal. The decibel plug should be sized as required during installation to 1-1/2" wide by the dimension between the top of the AMDB3-3 and the sill (undercut + AMDB3-3 mortise depth). **See drawing #3.**

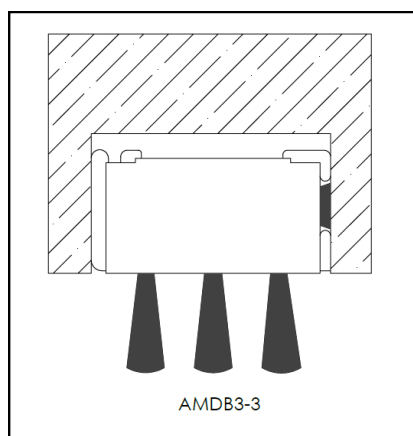

Drawing #1

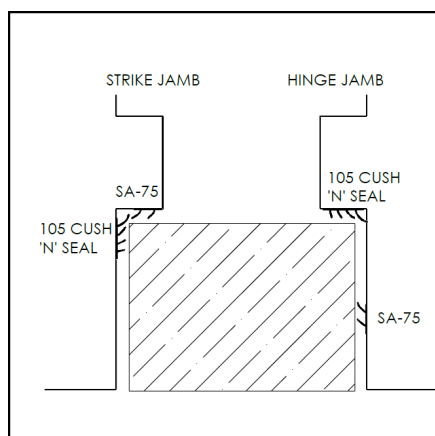

Drawing #2

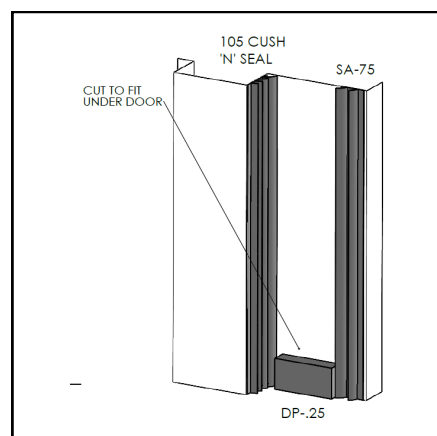

Drawing #3