

MOLDED DOOR OFFERING

PRIMED PAINTABLE INTERIOR DOOR


2 PANEL RAISED - 6'8" & 7'0"

DOOR SPECIFICATIONS


THICKNESS	1-3/8" or 1-3/4"
CORE	Solid Core Combination wood/MDF or all-wood frame 20-minute fire rating. Solid Mineral Core All wood frame 60-minute fire rating**
FINISH	Primed options arrive ready to paint. Smooth surface texture.
WARRANTY	5-Year Limited Warranty. Interior use only.

DIMENSIONAL TABLE

DOOR WIDTH	A	B	C	D
3/0	36"	23-3/4"	6-3/16"	3"
2/10	34"	21-3/4"	6-3/16"	3"
2/8	32"	21-3/4"	5-3/16"	3"
2/6	30"	19-3/4"	5-3/16"	3"
2/4	28"	17-3/4"	5-3/16"	3"
2/2	26"	15-3/4"	5-3/16"	3"
2/0	24"	15-3/4"	4-3/16"	3"
1/10	22"	15-3/4"	3-3/16"	2-1/8"
1/8	20"	12"	4"	3"
1/6	18"	12"	3"	1-5/8"
1/4	16"	7"	4-1/2"	3"
1/3	15"	7"	4"	2-11/16"
1/2	14"	7"	3-1/2"	2-1/8"
1/0	12"	7"	2-1/2"	1-3/8"

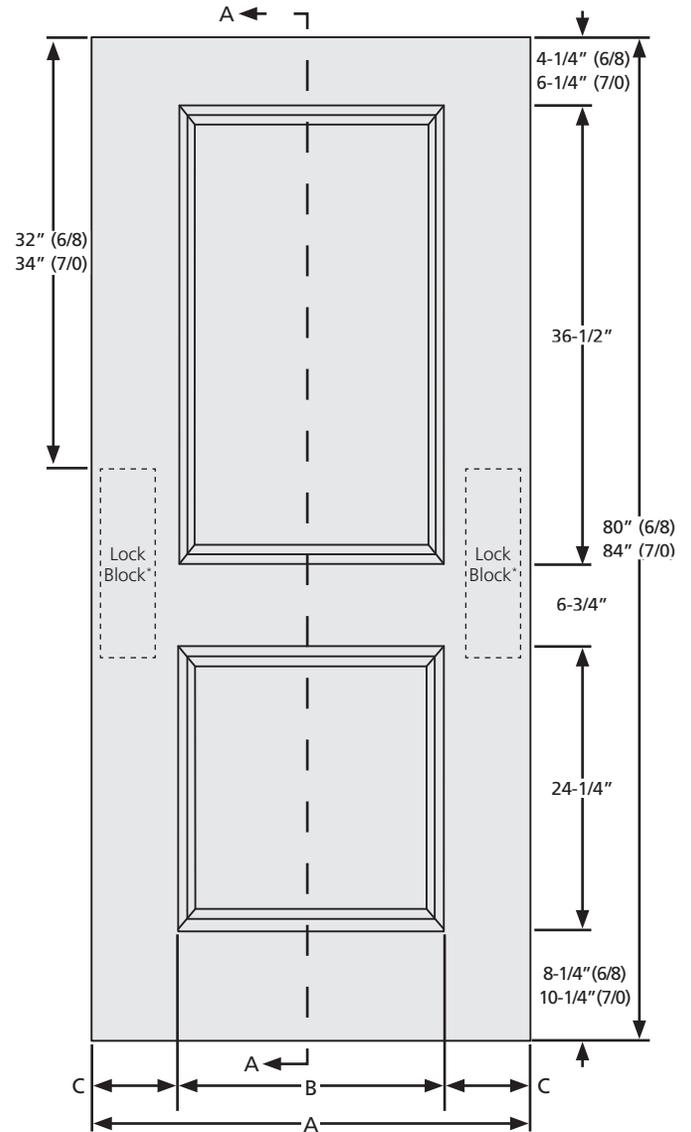


OVOLO STICKING

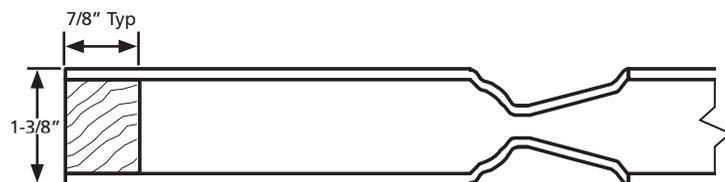

LOCK BLOCK

Details

*Number and size of Lock Blocks may vary by model and customer order selection.

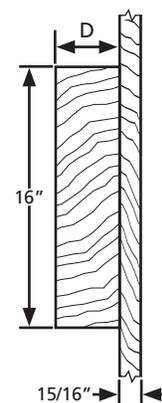

**Raised Panel doors available in 60 min Rated 1-3/4" only.
VT Industries reserves the right to change design and/or details of its products without notice.