

MOLDED DOOR OFFERING

PRIMED PAINTABLE INTERIOR DOOR


2 PANEL RAISED COLONIAL - 6'8" & 7'0"

DOOR SPECIFICATIONS


| | |
|-----------|---|
| THICKNESS | 1-3/8" or 1-3/4" |
| CORE | Solid Core Combination wood/MDF or all-wood frame 20-minute fire rating Solid Mineral Core All wood frame 60-minute fire rating** |
| FINISH | Primed options arrive ready to paint Smooth surface texture |
| WARRANTY | 5-Year Limited Warranty Interior use only |

DIMENSIONAL TABLE

| DOOR WIDTH | A | B | C | D |
|------------|-----|-----------|----------|----------|
| 3/0 | 36" | 25" | 5-1/2" | 3" |
| 2/10 | 34" | 22-13/16" | 5-19/32" | 3" |
| 2/8 | 32" | 22-13/16" | 4-19/32" | 3" |
| 2/6 | 30" | 19-11/16" | 5-5/32" | 3" |
| 2/4 | 28" | 18-1/8" | 4-15/16" | 3" |
| 2/2 | 26" | 14-15/16" | 5-17/32" | 3" |
| 2/0 | 24" | 14-15/16" | 4-17/32" | 3" |
| 1/10 | 22" | 14-15/16" | 3-17/32" | 2-1/8" |
| 1/8 | 20" | 9-1/2" | 5-1/4" | 3" |
| 1/6 | 18" | 9-1/2" | 4-1/4" | 3" |
| 1/4 | 16" | 7-1/2" | 4-1/4" | 3" |
| 1/3 | 15" | 7-1/2" | 3-3/4" | 2-11/16" |
| 1/2 | 14" | 7-1/2" | 3-1/4" | 2-1/8" |
| 1/0 | 12" | 6-11/16" | 2-21/32" | 1-5/8" |

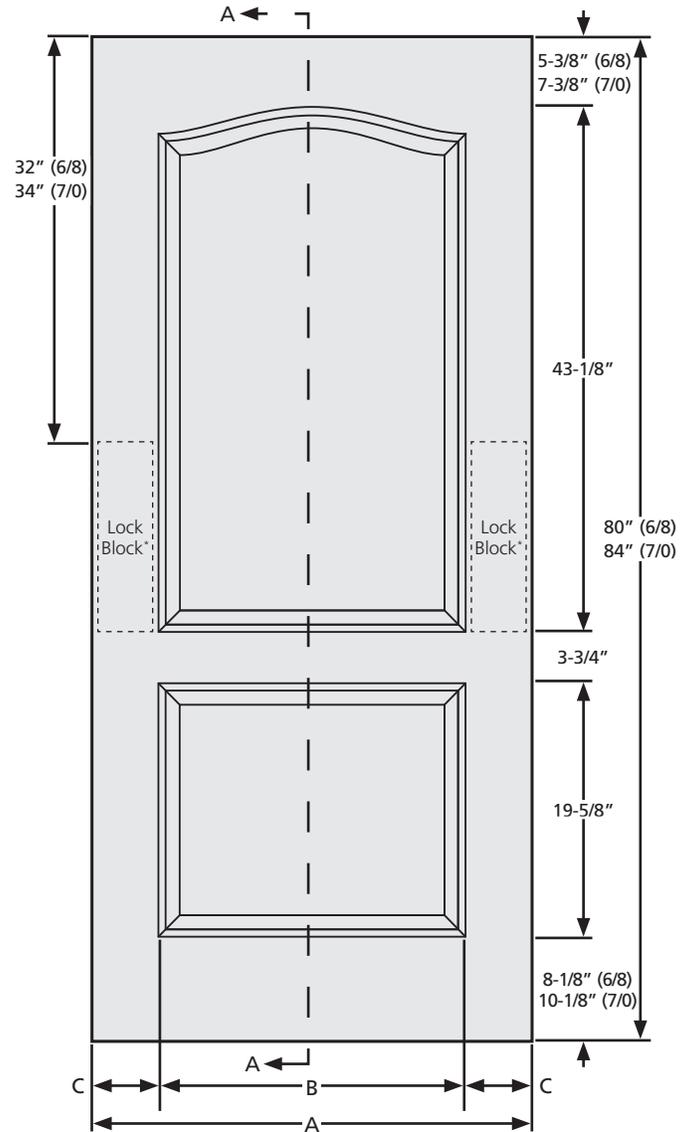


COVE & BEAD STICKING

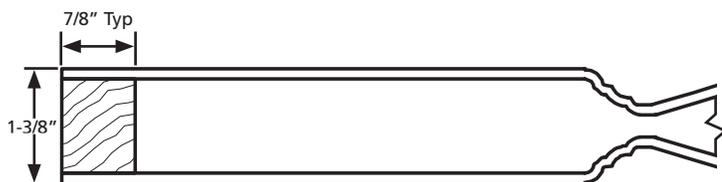

LOCK BLOCK

Details

*Number and size of Lock Blocks may vary by model and customer order selection.

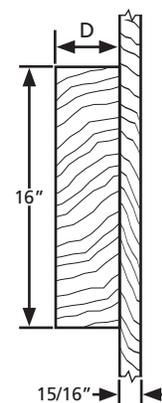

**Raised Panel doors available in 60 min Rated 1-3/4" only.
 VT Industries reserves the right to change design and/or details of its products without notice.