

PROJECT NAME: _____

P.O. NUMBER: _____

ORDER NUMBER: _____

LITE & LOUVERS

- Lites** Visible Cutout Cutout Only
Wood Flush Lip Type (Non-Rated & 20-Min. Only)
MVP Standard Veneer-Wrapped Stainless Painted To Match


- Louvers** Cut-Out Only
Wood Flat Slat Chevron _____
Metal Steel (Standard) Aluminum _____

- Glass** Factory Installed
 Glass by Others


NR Glass Type & Thickness (1/4" Standard)

20-Min. Glass Type & Thickness (1/4" Standard)


45-, 60-, 90-Min. Glass Type & Thickness (3/16" Standard)

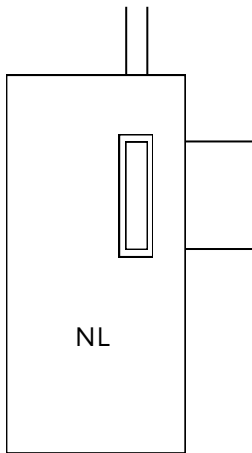


ELEVATION _____

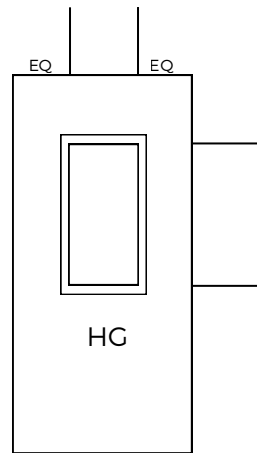


ELEVATION _____

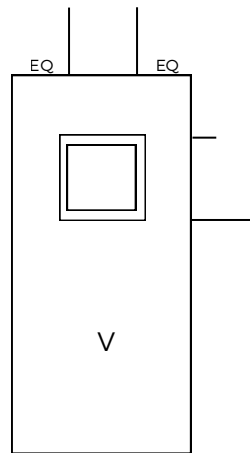


ELEVATION _____

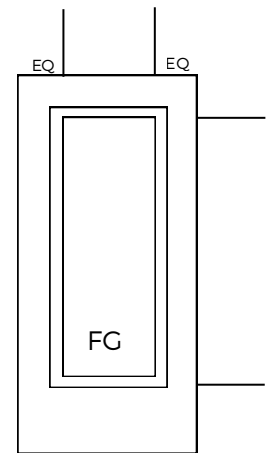


ELEVATION _____

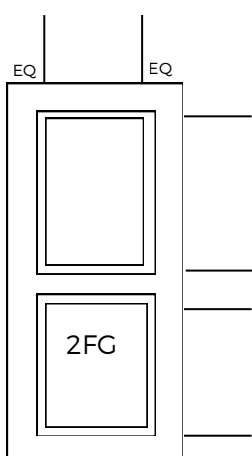


ELEVATION _____

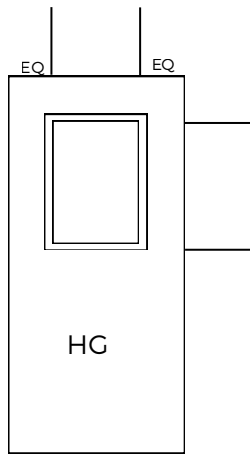

EXAMPLE: LITE WOOD BEAD
EDGE OF DOOR TO CUTOUT

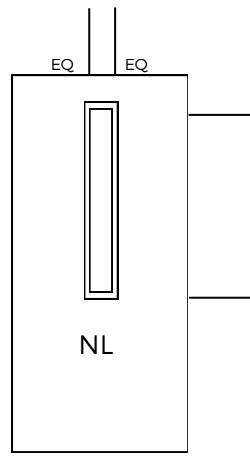

EXAMPLE: LITE METAL
VISION PANEL EDGE OF
DOOR TO VISIBLE LITE

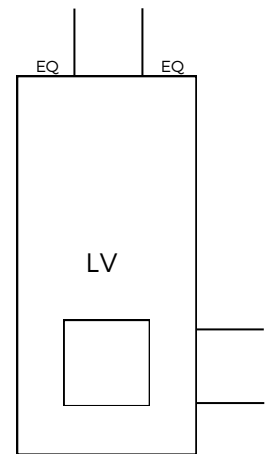

ELEVATION _____

NOTE: Minimum distance from edge of glass or louver cutout to edge of door or cutout for lock mortise is 6" on fire rated label doors and 5" on non-label doors. Please keep lock locations in mind when detailing glass or louver openings or label and warranty may be voided. 1-1/2" minimum on SLC Core, 20-Minute and non-label, 3" on special 45-minute construction.