


EGGERS COLLECTION: E100

NON-RATED, 20-, 45-, 60-, & 90-MINUTE POSITIVE PRESSURE

FLAT OR RAISED PANELS

DIMENSIONS	Door height: up to 10'-0" Width: up to 4'-0" Thickness: 1-3/8" (Non-rated), 1-3/4", or 2-1/4" Stile & rail width: 6" Bottom rail width: 10"
STILES	Particleboard or double refined MDF - stile have hardwood edge
RAILS	Particleboard or double refined MDF - sealed top & bottom rails
PANELS	Particleboard or double refined MDF
FINISH	WDMA TR-8/ System 10 Water-based UV cured acrylated polyurethane is standard. Primed and opaque coatings also available. VT color choices are available or custom color matching by submitting a physical sample (minimum 3" x 5")
STICKING, PANELS, & MOULDING OPTIONS	 Standard & custom sticking / bead profiles available; Options available vary depending on fire rating Raised and flat panel Optional raised moulding Panels can be replaced with glass
ADHESIVE	Type 1 adhesive
ACOUSTICAL RATING	Refer to STC chart
QUALITY STANDARDS	WDMA I.S. 6A & AWS, Section 9 Quality Standards
WDMA PERFORMANCE LEVEL	Extra heavy duty, fire composite blocking not required for this door type
SUSTAINABILITY	 Minimum 88% pre-consumer recycled content CARB Phase 2 / TSCA VI Compliant GREENGUARD GOLD FSC upon request, Consult VT for LEED documentation Environmental Product Declaration (EPD) Health Product Declaration (HPD)
DOOR WEIGHT	Varies by elevation & size; Please consult with VT
WARRANTY	LIMITED lifetime; INTERIOR USE ONLY. <u>VIEW warranty</u> .

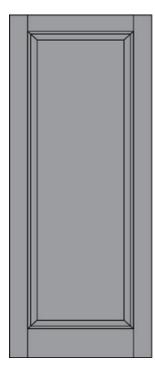

E100

^ Custom sizes and options available, longer lead times may apply. Please refer to the Stile and Rail Component Dimensions Chart for more information * Component Dimensions are based on nominal opening size of door # Door height & width restrictions vary depending on fire rating restrictions ** Stile width may vary depending on lite opening, hardware, and/or fire rating

VT INDUSTRIES RESERVES THE RIGHT TO CHANGE DESIGN AND/OR DETAILS OF ITS PRODUCTS WITHOUT NOTICE.









