



**Architectural
Wood Doors**


PALLADIUM COLLECTION

FLUSH AND RECESSED MIRROR DOORS
NON-RATED, STRUCTURAL COMPOSITE LUMBER
NEENAH/TWO RIVERS ONLY


INPRO RIGID VINYL – REMOVABLE EDGE

THICKNESS	1-3/4" or 2-1/4" ($\pm 1/16"$)
SIZE	4'-0" x 10'-0"
CORE	Structural Composite Lumber Core (SCLC), 70% of door construction weight
VERTICAL EDGES (STILES)	Structural Composite Lumber (SCL) with matching removable vinyl or stainless steel edge
HORIZONTAL EDGES (TOP & BOTTOM RAILS)	Structural Composite Lumber (SCL) - Sealed Top & Bottom Rails
FACES	Inpro® Rigid Vinyl (.040")
CROSSBANDS	High Density Fiberboard (HDF), 20% of door construction weight, Pre-consumer recycled material
STANDARDS	Bevel: 1/8" in 2" or 3° Type 1 Polyvinyl Acetate (PVA) Adhesive
FINISH	Woodgrains, Solid Colors, and Elements
HARDWARE/LITES	Butt Hinges, Electric Hinges, Cylindrical Locks, Mortise Locks, Rim and Surface Exit Devices, limitations may apply Pre-drilled hinge pilot holes Refer to Lite/Lock Cutout Margins Technical Bulletin Refer to VT Standard Surface Applied Mouldings with Profile Drawings Technical Bulletin for E19 mirror moulding profile
ACOUSTICAL RATING	N/A
QUALITY STANDARDS	WDMA I.S. 1-A & AWS, Section 9 Quality Standards (Bonded Core) Custom Grade (standard) or Premium Grade (available)
WDMA PERFORMANCE LEVEL	Extra Heavy Duty
SUSTAINABILITY	CARB Phase 2 / TSCA VI Compliant GREENGUARD GOLD FSC® upon request, consult VT for LEED documentation Environmental Product Declaration (EPD) Health Product Declaration (HPD) Refer to VT Sustainability page
WARRANTY	Limited Lifetime, Interior use only, reference VT Warranty


FLUSH MIRROR

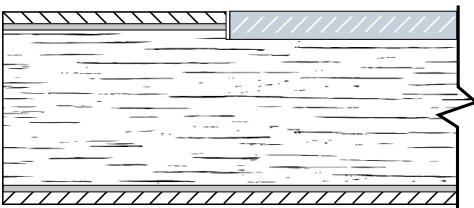

RECESSED MIRROR

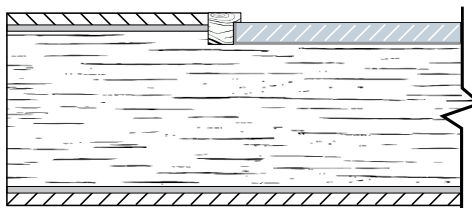

MIRROR

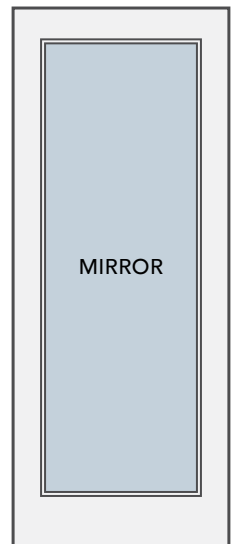

VT INDUSTRIES RESERVES THE RIGHT TO CHANGE DESIGN AND/OR DETAILS OF ITS PRODUCTS WITHOUT NOTICE.



**CUSTOMER
SERVICE**

800.827.1615
info@vtindustries.com
vtindustries.com



© 2026 VT Industries, Inc. All rights reserved 09-2026