



DOOR ELEVATIONS



ELEVATION _____




ELEVATION _____




ELEVATION _____




ELEVATION _____




ELEVATION _____

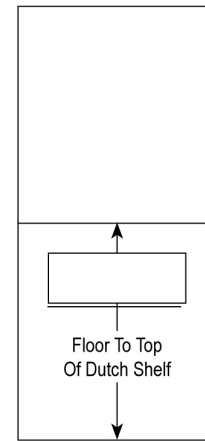


ELEVATION _____

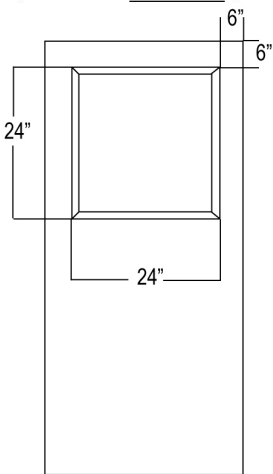


EXAMPLE: LITE WOOD BEAD
EDGE OF DOOR TO CUTOUT

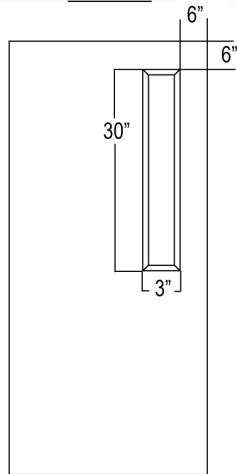

EXAMPLE: LITE METAL VISION
PANEL EDGE OF DOOR TO
VISIBLE LITE

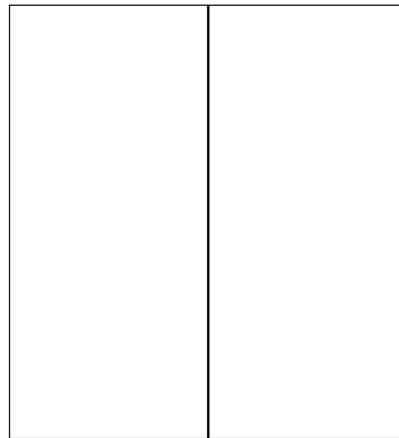

ELEVATION _____

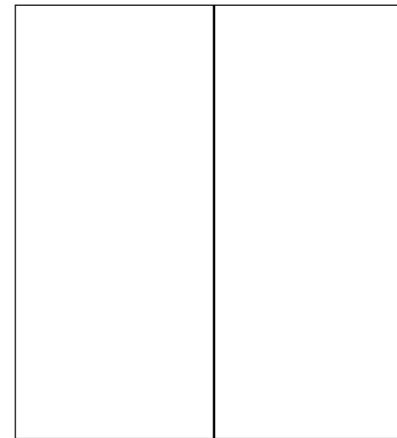

ELEVATION _____

NOTE: Minimum distance from edge of glass or louver cutout to edge of door or cutout for lock mortise is 6" on fire rated label doors and 5" on non-label doors. Please keep lock locations in mind when detailing glass or louver openings or label and warranty may be voided. 1-1/2" minimum on SLC Core, 20 minute and nonlabel, 3" on special 45 minute construction.

PROJECT NAME _____ P.O. NUMBER _____ ORDER NUMBER _____