


DUTCH DOOR DETAIL




To be used in conjunction with Schedule B

Dutch Door Notes:

- VT's standard clearance between the top leaf and bottom leaf is 1/8"
- Prefinished shelves must be factory installed
- Non-rated and 20-minute rated flush Dutch Doors must be constructed of SCL Core
- 45-minute (construction tag only) Dutch Doors must be constructed of mineral core
- Maximum STC rating on a Dutch Door is 44
- Please review the "Dutch Door-20 minute" document on the Eggers website for hardware, shelf, and size restrictions for 20 min rated doors
- When ordering pairs of rated Dutch Doors, please take into consideration all closing/latching requirements
- Mineral core Dutch Doors use standard shelf construction. Shelf is only available on the face of the door, not the top.
- Standard shelves are compatible lumber with veneer and crossbanding applied. Bull-nosed or radius-cut available with special shelf pricing.
- Stile and Rail Dutch Doors require a minimum 5" bottom rail on the top leaf and a minimum 5" top rail on the bottom leaf

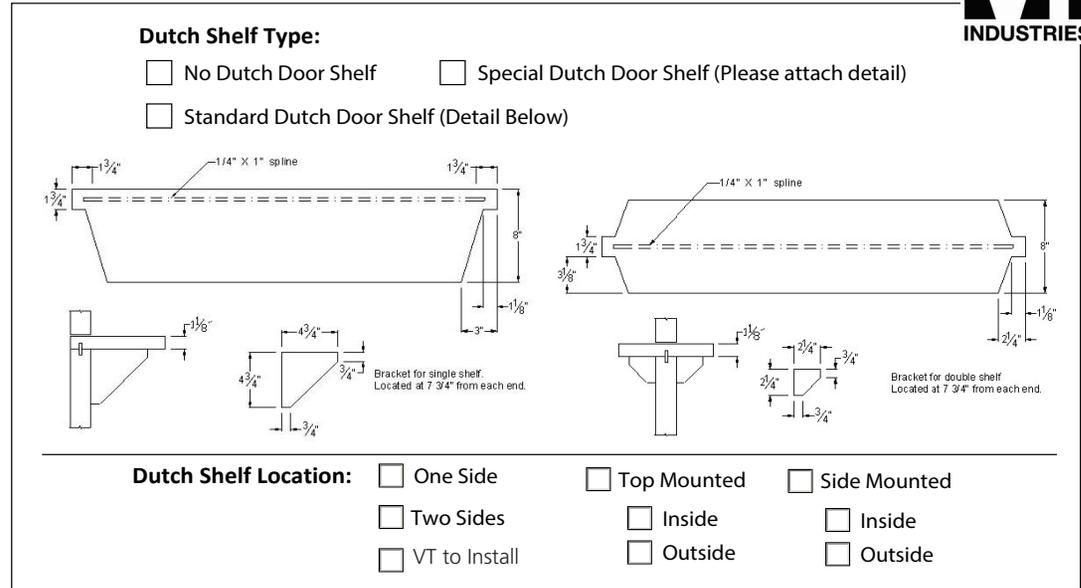

Please enter all hardware information on Schedule B. All hardware locations should be per the prefit height listed below. Check for hardware/dutch clearance conflicts.

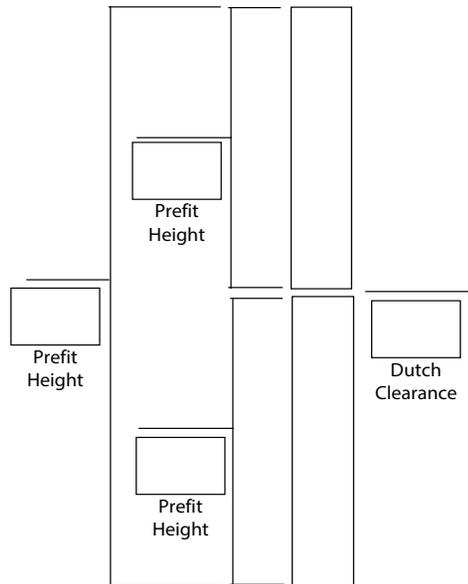

Mark Numbers:

Notes:

Note: This box is for use with flush doors with moulding or Stile and Rail Doors only. Please complete elevation. **Provide all dimensions per prefit door size.**

Applied/Stylus Moulding Type:

or

Stile and Rail Profile:

Top Leaf:

Top Rail: Bottom Rail:

Lock Stile: Hinge Stile:

Mullion (S/R Only):

Crossrail (S/R Only):

Bottom Leaf:

Top Rail: Bottom Rail:

Lock Stile: Hinge Stile:

Mullion (S/R Only):

Crossrail (S/R Only):