



**Architectural
Wood Doors**



PALLADIUM COLLECTION

SURFACE APPLIED MIRROR DOORS
NON-RATED, 20-, 45-MINUTE POSITIVE PRESSURE
PC, SCLC, WSPC, FD (PYROFORCE)

INPRO RIGID VINYL – REMOVABLE EDGE

THICKNESS	1-3/4" or 2-1/4" (± 1/16")
SIZE	4'-0" x 10'-0"; Refer to Fire Door Capability Chart for allowances and restrictions
CORE	Particleboard Core (PC) ANSI A208.1, grade LD-2, 70% of door construction weight, pre-consumer recycled materials, Structural Composite Lumber Core (SCLC) 70% of door construction weight, Agrifiber Core, ANSI A208.1, Grade LD-2, 70% of door construction weight, Composed of pre-consumer rapidly renewable material or Fire Composite (Pyroforce)
VERTICAL EDGES (STILES)	Hardwood or Fire Composite as required with concealed intumescent (Category A), with matching removable vinyl or stainless steel edge
HORIZONTAL EDGES (TOP & BOTTOM RAILS)	Structural Composite Lumber (SCL) or Fire Composite as required with intumescent (Category A) on the top rail only - Sealed Top & Bottom Rails
FACES	Inpro® Rigid Vinyl (.040")
CROSSBANDS	High Density Fiberboard (HDF), 20% of door construction weight, Pre-consumer recycled material (5-Ply only)
STANDARDS	Bevel: 1/8" in 2" or 3° Fire rated clearance per NFPA 80, Fire rating per UL 10C/NFPA252 Type 1 Polyvinyl Acetate (PVA) Adhesive
FINISH	Woodgrains, Solid Colors, and Elements
HARDWARE/LITES	Butt Hinges, Electric Hinges, Cylindrical Locks, Mortise Locks, Rim and Surface Exit Devices, limitations may apply Pre-drilled hinge pilot holes Refer to Lite/Lock Cutout Margins Technical Bulletin Refer to VT Standard Surface Applied Mouldings with Profile Drawings Technical Bulletin for E19 mirror moulding profile
ACOUSTICAL RATING	N/A
QUALITY STANDARDS	WDMA I.S. 1-A & AWS, Section 9 Quality Standards (Bonded Core) Premium Grade
WDMA PERFORMANCE LEVEL	PC, WSPC, FD: Heavy Duty For Extra Heavy Duty; Refer to WDMA Performance Duty Levels Technical Bulletin SCLC: Extra Heavy Duty
SUSTAINABILITY	CARB Phase 2 / TSCA VI Compliant GREENGUARD GOLD FSC® upon request, consult VT for LEED documentation Environmental Product Declaration (EPD) Health Product Declaration (HPD) Refer to VT Sustainability page
WARRANTY	Limited Lifetime, Interior use only, reference VT Warranty

SURFACE APPLIED MIRROR

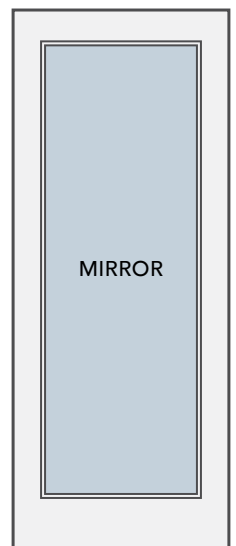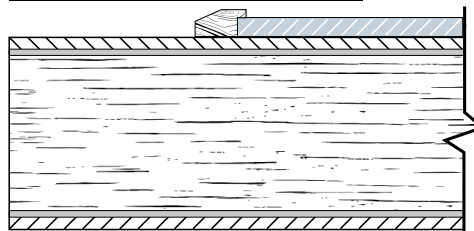

VT INDUSTRIES RESERVES THE RIGHT TO CHANGE DESIGN AND/OR DETAILS OF ITS PRODUCTS WITHOUT NOTICE.



**CUSTOMER
SERVICE**

800.827.1615
info@vtindustries.com
vtindustries.com



© 2026 VT Industries, Inc. All rights reserved 09-2026